



NOWOX CO., LIMITED.

Tel: +90 532 167 40 52 (Turkey) / +86 185 7842 8643 (China)

E-Mail: sales@nowox.cn

www.nowox.cn



2025
PRODUCT CATALOG

CONTENTS

Plastic Downlight ----- P01~18

				
DL01/P01	DL01-V2/P02	DL01-F/P03	DL01-F-S/P04	DL02/P05
				
DL03/P06	DL09/P07	DL10.2.0/P08	DL11/P09	DL11A/P10
				
DL13/P11	DL40/P12	DL41/P13	DL56/P14	DL57/P15
				
DL61/P16	DL83/P17	DL84/P18		

Aluminum Downlight ----- P21~72

				
DL04/P21	DL05/P22	DL06/P23	DL07/P24	DL08/P25
				
DL12/P26	DL14/P27	DL15/P28	DL16/P29	DL17/P30

				
DL18/P31	DL19/P32	DL20/P33	DL21/P34	DL22/P35
				
DL23/P36	DL25/P37	DL25-S/P38	DL26/P39	DL27/P40
				
DL28/P41	DL29/P42	DL30/P43	DL30A/P44	DL30B/P45
				
DL31/P46	DL36/P47	DL37/P48	DL38/P49	DL39/P50
				
DL42/P51	DL43/P52	DL45/P53	DL46/P54	DL48/P55
				
DL49/P56	DL50/P57	DL51/P58	DL51-S/P59	DL55/P60
				
DL58/P61	DL64/P62	DL64A/P63	DL67/P64	DL68/P65
				
DL69/P66	DL71/P67	DL72/P68	DL78/P69	DL85/P70
				
DL86/P71	DL87/P72			

Surface Mounted Light-----P75~86



Track Light-----P89~100



Ceiling Light-----P103~110



Wall Light-----P113~124



Batten Light-----P127~131



Panel Light-----P134~136



Smart socket-----P137





Plastic Downlight

DL01 Downlight



- 1. Advanced thermal conductive plastic radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3.IC-4 , IC-F rated
- 4.Lumen efficiency can up to 100lm/w
- 5.Tri-colour design, can reduce your stock
- 6.Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 7.Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish White Black



3CCT CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL01-02	6W	100lm/w	Ø95xH65mm	70mm	IP44	0.14	48
	DL01-03	10W	100lm/w	Ø115xH70mm	90mm	IP44	0.16	40
	DL01-06	18W	100lm/w	Ø190xH76mm	150mm	IP44	0.31	20
	DL01-08	20W	100lm/w	Ø230xH80mm	200mm	IP44	0.40	20

DL01-V2 Downlight



- 1. Advanced thermal conductive plastic radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3.IC-4 , IC-F rated
- 4.Lumen efficiency can up to 100lm/w
- 5.Tri-colour design, can reduce your stock
- 6.Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 7.Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish White Black



3CCT CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL01-02-V2	6W/8W	100lm/w	Ø92xH62mm	70mm	IP44	0.16	40
	DL01-03-V2	8W/10W/12W	100lm/w	Ø110xH70mm	90mm	IP44	0.23	40

DL01-F Downlight



- 1. Advanced thermal conductive plastic radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3.IC-4 , IC-F rated
- 4.Lumen efficiency can up to 100lm/w
- 5.Tri-colour design, can reduce your stock
- 6.Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 7.Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish White Black



3CCT CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL01-02-F	5W/6W	100lm/w	Ø92xH55mm	Ø70mm	IP44	0.15	40
	DL01-03-F	8W/10W	100lm/w	Ø115xH60mm	Ø90mm	IP44	0.16	40
	DL01-04-F	13W/14W	100lm/w	Ø140xH65mm	Ø110mm	IP44	0.23	30
	DL01-06-F	15W/18W	100lm/w	Ø190xH70mm	Ø150mm	IP44	0.34	20
	DL01-08-F	20W/22W	100lm/w	Ø230xH95mm	Ø200mm	IP44	0.44	20

DL01-F-S Downlight



- 1.Thermal conductive plastic coated aluminum housing, V-0 flame rating
- 2. 220-240V built-in driver, integrated design
- 3. IC-4 rated
- 4. Non dimmable/ Triac dimmable available
- 5. Gimbal fascia design and can be used on some special area
- 6. Tri-colour design ,can reduce your stock
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish White Black



3CCT CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL01-03-F-S	6W	100lm/w	Ø115xH60mm	Ø90mm	IP44	0.16	40
	DL01-03-F-S	8W	100lm/w	Ø115xH60mm	Ø90mm	IP44	0.16	40

DL02 Downlight




- 1. Thermal conductive plastic coated aluminum housing, V-0 flame rating
- 2. 220-240V built-in driver, integrated design
- 3. IC-4 rated
- 4. Non dimmable/ Triac dimmable available
- 5. Gimbal fascia design and can be used on some special area
- 6. Tri-colour design ,can reduce your stock
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL02-02	5W/6W	90lm/w	Ø85xH55mm	Ø70mm	IP20	0.14	48
	DL02-03	8W/10W	90lm/w	Ø105xH65mm	Ø90mm	IP20	0.20	36
	DL02-02-RF	5W/6W	90lm/w	Ø85xH55mm	Ø70mm	IP20	0.13	48
	DL02-03-RF	8W/10W	90lm/w	Ø105xH65mm	Ø90mm	IP20	0.19	36


DL03 Downlight




- 1. Advanced thermal conductive plastic radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3. IC-4 , IC-F rated
- 4. Lumen efficiency can up to 100lm/w
- 5. Tri-colour design, can reduce your stock
- 6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL03-03	8W/10W	90lm/w	Ø108xH48mm	Ø90mm	IP20	0.19	40
	DL03-03-F	8W/10W	90lm/w	Ø108xH40mm	Ø90mm	IP20	0.17	40
	DL03-03-WIFI	8W/10W	80lm/w	Ø108xH48mm	Ø90mm	IP20	0.16	40

DL09 Downlight



- 1. Advanced thermal conductive plastic radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3.IC-4 , IC-F rated
- 4.Lumen efficiency can up to 100lm/w
- 5.Tri-colour design, can reduce your stock
- 6.Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 7.Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL09-90	8W	100lm/w	Ø115xH45mm	Ø90mm	IP44	0.11	48

DL10.2.0 Downlight



- 1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Deep recessed downlight with lens, beam angle is 60 degree, UGR<19.
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. The materials of this downlight is plastic+aluminum, high cost effective
- 6. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL10.2.0-02	6W	90lm/w	Ø90.5xH71.6mm	Ø70mm	IP44	0.14	40
	DL10.2.0-03	10W	90lm/w	Ø102xH88mm	Ø90mm	IP44	0.18	40
	DL10.2.0-02-RF	6W	90lm/w	Ø90.5xH71.6mm	Ø70mm	IP44	0.14	40
	DL10.2.0-03-RF	10W	90lm/w	Ø102xH88mm	Ø90mm	IP44	0.17	40

DL11 Downlight



- 1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Flat surface deign integrates well into ceiling
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. Quick connector inside the light, easy to be connected
- 6. Opal PC diffuser and plastic covered aluminumhousing
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL11-03-F	6W/8W/10W	100lm/w	Ø108xH41mm	Ø90mm	IP44	0.16	40
	DL11-03-R	6W/8W/10W	100lm/w	Ø108xH46mm	Ø90mm	IP44	0.17	40

DL11A Downlight



- 1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Flat surface deign integrates well into ceiling
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. Quick connector inside the light, easy to be connected
- 6. Opal PC diffuser and plastic covered aluminumhousing
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL11A-03-F	6W/8W	100lm/w	Ø115xH45mm	Ø90mm	IP44	0.15	40
	DL11A-03-R	6W/8W	100lm/w	Ø115xH45mm	Ø90mm	IP44	0.15	40

DL13 Downlight




- 1. Integral dimmable driver, perfect smooth phase dimming to create required lighting level.
- 2. A versatile design supplied with flex and plug fitted for easy installation
- 3. High efficiency SMD LED chips
- 4. CRI > 80, selectable CCT 3000 / 4000 / 5700K, beam distribution 60 degree, UGR<19
- 5. Polyamide trim and body form in white or black
- 6. Low glare, suitable for residential and commercial applications minimising direct glare whilst still providing even and effective illumination.
- 7. IC - 4, IC-F rated

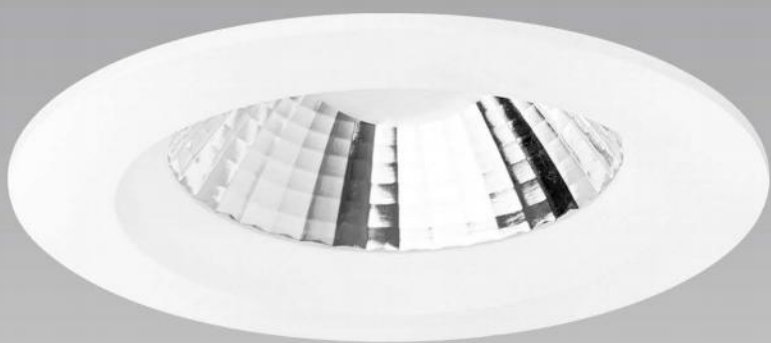
Finish ———  White  Black



3CCT ———  CW NW WW

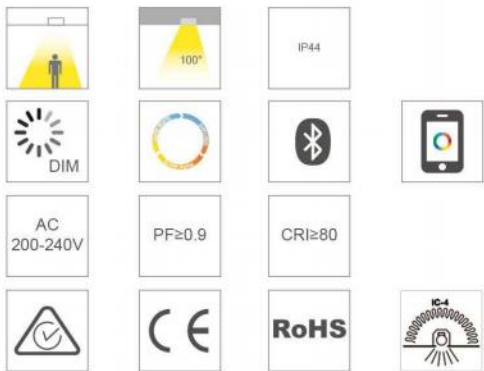
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL13-03	10W	90lm/w	Ø105xH70mm	Ø90mm	IP20	0.20	40
	DL13-03-RF	10W	90lm/w	Ø105xH70mm	Ø90mm	IP20	0.19	40


DL40 Downlight




- 1. External driver, fit for most of branded dimmers including leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here
- 6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart ccontrol
- 7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ———  White  Black



3CCT ———  CW NW WW

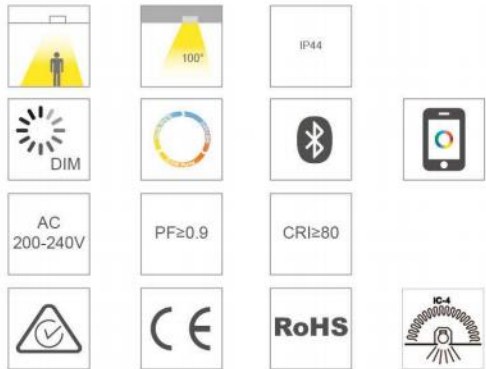
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL40-03	8W/9W10W	100lm/w	Ø108xH48mm	Ø90mm	IP44	0.22	40

DL41 Downlight




- 1. Internal driver, fit for most of branded dimmers including leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 6. Optional to install recessed and flat fascia.
- 7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL41-03	8W/9W/10W	100lm/w	Ø108×H65mm	Ø90mm	IP44	0.19	48
	DL41-03-RF	8W/9W/10W	90lm/w	Ø108×H65mm	Ø90mm	IP44	0.19	48


DL56 Downlight




- 1. Internal driver, fit for most of branded dimmers including leading edge dimmer
- 2. IC-4 rated, V-0 flame rating on the housing
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour on the light to help you to reduce the stock qtys
- 5. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 6. Optional to install recessed and flat fascia.
- 7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL56-02	5W/6W	50lm/w	Ø88×H50mm	Ø75mm	IP20	0.06	60
	DL56-03	8W/10W/12W	60lm/w	Ø120×H55mm	Ø100mm	IP20	0.11	48
	DL56-06	15W/18W	70lm/w	Ø160×H55mm	Ø140mm	IP20	0.18	36
	DL56-08	20W/22W	80lm/w	Ø220×H55mm	Ø200mm	IP20	0.34	20

DL57 Downlight



- 1. Plastic Cover Aluminum Material: Excellent heat dissipation for prolonged product life
- 2. Ultra-Thin Design: Compact 33mm height fits seamlessly into ceilings
- 3. 3-CCT Switchable: Customize lighting with a dip switch for warm, neutral, or cool tones
- 4. Triac Dimmable: Compatible with triac dimmers for smooth light adjustment
- 5. External Driver: Easy installation and maintenance with an external driver
- 6. IP44 Rated on the front face: Resistant to dust and water splashes, perfect for kitchens, bathrooms

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL57-03	8W	100lm/w	Ø108×H32mm	Ø90mm	IP44	0.16	48
	DL57-04	10W/12W	100lm/w	Ø138×H36mm	Ø120mm	IP44	0.23	36

DL61 Downlight



- 1. Plastic Cover Aluminum Material: Excellent heat dissipation for prolonged product life
- 2. Ultra-Thin Design: Compact 33mm height fits seamlessly into ceilings
- 3. 3-CCT Switchable: Customize lighting with a dip switch for warm, neutral, or cool tones
- 4. Triac Dimmable: Compatible with triac dimmers for smooth light adjustment
- 5. External Driver: Easy installation and maintenance with an external driver
- 6. IP20 Rated on the front face: Resistant to dust and water splashes, perfect for kitchens, bathrooms

Finish ——— White Black



3CCT ——— CW NW WW

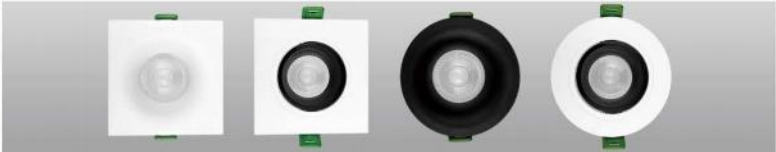
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL61-02	3W	60lm/w	Ø90×H50mm	Ø75mm	IP20	-	60
	DL61-03	5W	70lm/w	Ø115×H50mm	Ø95mm	IP20	0.18	48
	DL61-04	8W/9W	80lm/w	Ø130×H50mm	Ø110mm	IP20	0.22	36
	DL61-05	10W/12W	90lm/w	Ø145×H50mm	Ø120mm	IP20	0.24	36
	DL61-06	15W/18W	100lm/w	Ø175×H50mm	Ø140mm	IP20	0.27	24
	DL61-08	20W/22W	100lm/w	Ø225×H50mm	Ø200mm	IP20	0.36	24

DL83 Downlight



- 1.Advanced thermal conductive plastic radiator
- 2.Built-in driver, fit for most of branded dimmersincluding leading edge dimmer
- 3. Quick connector inside the light, easy to beconnected
- 4.Tri-colour design ,can reduce your stock
- 5. Modularization- 4 types of fascias can bereplaced by customers

Finish ————  White  Black












3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL83-75-GR	5W	80lm/w	Ø90xH40mm	Ø70mm	IP20	0.45	60
	DL83-75-GS	5W	80lm/w	Ø90xH40mm	Ø70mm	IP20	0.38	60
	DL83-75-FR	5W	80lm/w	Ø90xH26mm	Ø70mm	IP20	0.42	60
	DL83-75-FS	5W	80lm/w	Ø90xH42mm	Ø75mm	IP20	0.49	60

DL84 Downlight



- 1.Advanced thermal conductive plastic radiator
- 2.External driver, fit for most of branded dimmers including leading edge dimmer
- 3.Deep recessed fascia, low glare, UGR<19
- 4.Tri-colour design ,can reduce your stock
- 5. IC-F, IC-4 rated

Finish ————  White  Black












3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL84	6W/8W	50lm/w	Ø108xH61mm	Ø80mm	IP20	0.21	36



Aluminum Downlight

DL04 Downlight



- 1. Die-casting aluminum material, excellent heat-dissipation
- 2. IC-4 rated
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour optional to reduce stock
- 5. Super slim design, suitable for many low roof
- 6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL04-03-12	12W	90lm/w	Ø114xH30mm	Ø90mm	IP20	0.25	36
	DL04-03-12-R	12W	90lm/w	Ø114xH30mm	Ø90mm	IP20	0.24	36
	DL04-03-12-WIFI	12W	80lm/w	Ø114xH30mm	Ø90mm	IP20	0.26	36

DL05 Downlight



- 1. Advanced thermal conductive plastics radiator
- 2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
- 3. Tri-colour design, can reduce your stock
- 4. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
- 5. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL05-03	10W	80lm/w	Ø90xH60mm	Ø75mm	IP20	0.31	24
	DL05-04	18W	80lm/w	Ø102xH80mm	Ø90mm	IP20	0.39	18
	DL05-05	24W	90lm/w	Ø125xH108mm	Ø110mm	IP20	0.66	12
	DL05-06	36W	100lm/w	Ø140xH115mm	Ø125mm	IP20	1.15	8
	DL05-07	52W	100lm/w	Ø160xH135mm	Ø145mm	IP20	1.43	8

DL06 Downlight

Aluminum Light



- 1. Die-casting aluminum material, excellent heat-dissipation
- 2. IC-4 rated
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour optional to reduce stock
- 5. Super slim design, suitable for many low roof
- 6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL06-95	12W	90lm/w	Ø100xH64mm	Ø95mm	IP65	0.43	24
	DL06-115	20W	90lm/w	Ø120xH68mm	Ø115mm	IP65	0.55	16
	DL06-150	30W	100lm/w	Ø165xH79mm	Ø150mm	IP65	0.90	12
	DL06-200	40W	100lm/w	Ø210xH86mm	Ø200mm	IP65	1.27	8

DL07 Downlight

Aluminum Light



- 1. Die-casting aluminum material, excellent heat-dissipation
- 2. IC-4 rated
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour optional to reduce stock
- 5. Super slim design, suitable for many low roof
- 6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL07-75	5W	80lm/w	Ø90xH47mm	Ø75mm	IP20	0.22	36
	DL07-95	10W	90lm/w	Ø110xH53mm	Ø95mm	IP20	0.32	24
	DL07-115	15W	90lm/w	Ø140xH62mm	Ø115mm	IP20	0.44	18
	DL07-145	24W	100lm/w	Ø175xH75mm	Ø145mm	IP20	0.61	12

DL08 Downlight



- 1.Die-casting aluminum material, excellent heat-dissipation
- 2.IC-4 rated
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour optional to reduce stock
- 5. Super slim design, suitable for many low roof
- 6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.

Finish ——— White Black



3CCT ——— CW NW WW



	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL08-70	8W	80lm/w	Ø78xH70mm	Ø70mm	IP20	0.32	24
	DL08-90	13W	80lm/w	Ø98xH85mm	Ø90mm	IP20	0.43	18
	DL08-110	24W	90lm/w	Ø122xH90mm	Ø110mm	IP20	0.60	12
	DL08-130	36W	90lm/w	Ø142xH95mm	Ø130mm	IP20	0.85	12

DL12 Downlight



- 1.Die-casting aluminum material, excellent heat-dissipation
- 2.IC-4 rated
- 3. Lumen efficiency can up to 100lm/w
- 4. Tri-colour optional to reduce stock
- 5. Super slim design, suitable for many low roof
- 6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.

Finish ——— White Black



3CCT ——— CW NW WW



	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL12-60	7W	80lm/w	Ø68x60mm	Ø60mm	IP20	0.25	36
	DL12-75	10W	80lm/w	Ø85x75mm	Ø75mm	IP20	0.35	24
	DL12-90	18W	90lm/w	Ø100x90mm	Ø90mm	IP20	0.47	18
	DL12-110	28W	90lm/w	Ø125x110mm	Ø110mm	IP20	0.80	12

DL14 Downlight




- 1.Made from high-quality die-cast aluminum for superior heat dissipation
- 2.Elegant and refined design suitable for upscale environments
- 3. Available with bezel color options to match different interiors
- 4. Supports triac, DALI, and 0-10V dimming for versatile lighting control
- 5. Long-lasting and reliable performance for various applications

Finish ———  White  Black



3CCT ———  CW NW WW

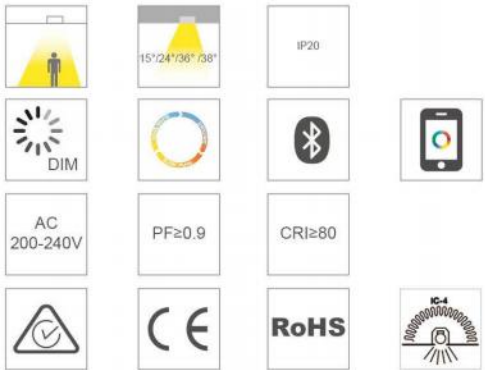
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL14-75	10W	80lm/w	Ø86xH88mm	Ø75mm	IP20	0.35	30

DL15 Downlight




- 1. Constructed from die-cast aluminum for superior heat dissipation
- 2. High-end, refined design suitable for modern interiors
- 3. Anti-glare technology for comfortable, soft lighting.
- Available in black and white bezel options to complement different styles
- 4. Supports triac, DALI, and 0-10V dimming for versatile lighting control
- 5. Reliable performance with enhanced longevity

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL15-60	7W	80lm/w	Ø68xH64mm	Ø60mm	IP20	0.37	24
	DL15-75	10W	80lm/w	Ø85xH75mm	Ø75mm	IP20	0.50	18
	DL15-85	15W	90lm/w	Ø95xH92mm	Ø85mm	IP20	0.64	12

DL16 Downlight



- 1. Strong heat dissipation of the heatsink, IC-4 rated
- 2. Constant current trailing edge dimmable and non-dimmable driver configurations fitted with flex and plug
- 3. 3-CCT function is optional, CCT smooth adjustable switch on the driver
- 4. High efficiency SMD LED chips
- 5. Deep Anti-glare design
- 6. IP44 protection degree for indoor use
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart ccontrol
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL16-95	12W	90lm/w	Ø100xH64mm	Ø95mm	IP20	0.46	20
	DL16-115	20W	90lm/w	Ø120xH68mm	Ø115mm	IP20	0.54	16
	DL16-150	30W	100lm/w	Ø165xH79mm	Ø150mm	IP20	0.85	12
	DL16-200	40W	100lm/w	Ø210xH86mm	Ø200mm	IP20	1.33	8

DL17 Downlight



- 1. Strong heat dissipation of the heatsink, IC-4 rated
- 2. Constant current trailing edge dimmable and non-dimmable driver configurations fitted with flex and plug
- 3. 3-CCT function is optional, CCT smooth adjustable switch on the driver
- 4. High efficiency SMD LED chips
- 5. Deep Anti-glare design
- 6. IP44 protection degree for indoor use
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart ccontrol

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL17-90	10W	80lm/w	Ø103xH78mm	Ø90mm	IP65	0.40	18

DL18 Downlight

Aluminum Light




- 1. Die-cast aluminum construction ensures excellent heat dissipation
- 2. Elegant design with anti-glare technology for comfortable lighting
- 3. Inner ring available in multiple color options to match different decors
- 4. Supports triac, DALI, and 0-10V dimming for flexible lighting control
- 5. Reliable and durable, ideal for upscale residential and commercial spaces

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL18-65	7W	80lm/w	Ø74xH67mm	Ø65mm	IP20	0.41	18
	DL18-75	10W	80lm/w	Ø84xH77mm	Ø75mm	IP20	0.51	18
	DL18-90	15W	90lm/w	Ø100xH95mm	Ø90mm	IP20	0.67	12

DL19 Downlight

Aluminum Light




- 1. Die-cast aluminum construction ensures superior heat dissipation
- 2. High-end design suitable for modern interiors
- 3. Available in black and white bezel options to complement various decor styles
- 4. Supports triac, DALI, and 0-10V dimming for versatile lighting control
- 5. Reliable and durable, designed for long-lasting performance

Finish ———  White  Black



3CCT ———  CW NW WW

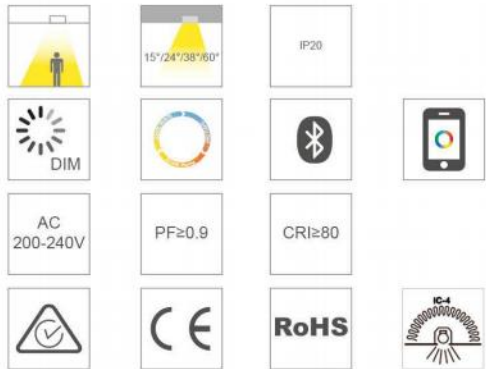
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL19-65	7W	80lm/w	Ø70xH57mm	Ø65mm	IP20	0.35	24
	DL19-75	10W	80lm/w	Ø85xH65mm	Ø75mm	IP20	0.43	18
	DL19-90	15W	90lm/w	Ø95xH79mm	Ø90mm	IP20	0.58	12

DL20 Downlight



- 1. Die-cast aluminum body for excellent heat dissipation
- 2. Frameless design for a clean, modern look
- 3. Bezel color options include black, white, silver, and rose gold
- 4. Compatible with triac, DALI, and 0-10V dimming
- 5. High durability and reliable performance

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL20-55	7W	80lm/w	Ø65×H62mm	Ø55mm	IP20	0.39	24
	DL20-65	10W	90lm/w	Ø75×H70mm	Ø65mm	IP20	0.46	18
	DL20-75	15W	90lm/w	Ø85×H86mm	Ø75mm	IP20	0.65	12

DL21 Downlight



- 1. Die-cast aluminum body for excellent heat dissipation
- 2. Frameless design for a clean, modern look
- 3. Bezel color options include black, white, silver, and rose gold
- 4. Compatible with triac, DALI, and 0-10V dimming
- 5. High durability and reliable performance

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL21-55	6W	60lm/w	Ø60×H88mm	Ø55mm	IP20	0.15	48
	DL21-75	18W	70lm/w	Ø85×H88mm	Ø75mm	IP20	0.36	24
	DL21-95	24W	80lm/w	Ø105×H95mm	Ø95mm	IP20	0.47	18
	DL21-115	40W	80lm/w	Ø130×H55mm	Ø115mm	IP20	0.68	12

DL22 Downlight




- 1. Die-casting aluminum housing, excellent heat dissipation
- 2. External triac-dimmable driver, long lifespan.
- 3. Inside fascia are optional to be silver, black, white
- 4. Excellent matt white powder coat finish, the colour can be customized
- 5. Deep anti-glare design, UGR<19
- 6. IC-4 rated
- 7. IP67, whole lamp can be soaked in water

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL22-90	10W	70lm/w	Ø100xH75mm	Ø90mm	IP65	0.24	24
	DL22-130	18W	80lm/w	Ø140xH90mm	Ø110mm	IP65	0.56	18
	DL22-170	24W	90lm/w	Ø185xH112mm	Ø170mm	IP65	1.06	8
	DL22-200	36W	100lm/w	Ø230xH128mm	Ø200mm	IP65	1.53	8

DL23 Downlight




- 1. Die-casting aluminum housing, excellent heat dissipation
- 2. External triac-dimmable driver, long lifespan
- 3. Inside fascia are optional to be silver, black, white
- 4. Excellent matt white powder coat finish, the colour can be customized
- 5. Deep anti-glare design, UGR<19
- 6. IC-4 rated
- 7. The light and the LED driver both have IP65 rated weatherproof construction. This downlight is ideal for all interior uses, including wet areas, such as bathrooms and laundries. It is also suitable for some outdoor areas

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL23-75	10W	70lm/w	Ø86xH90mm	Ø75mm	IP20	0.35	24
	DL23-90	15W	70lm/w	Ø110xH100mm	Ø90mm	IP20	0.43	18
	DL23-120	18W	70lm/w	Ø130xH110mm	Ø120mm	IP20	0.70	12
	DL23-170	28W	70lm/w	Ø180xH120mm	Ø170mm	IP20	1.17	8
	DL23-190	40W	70lm/w	Ø210xH140mm	Ø190mm	IP20	1.41	8
	DL23-220	60W	70lm/w	Ø240xH145mm	Ø220mm	IP20	1.91	6

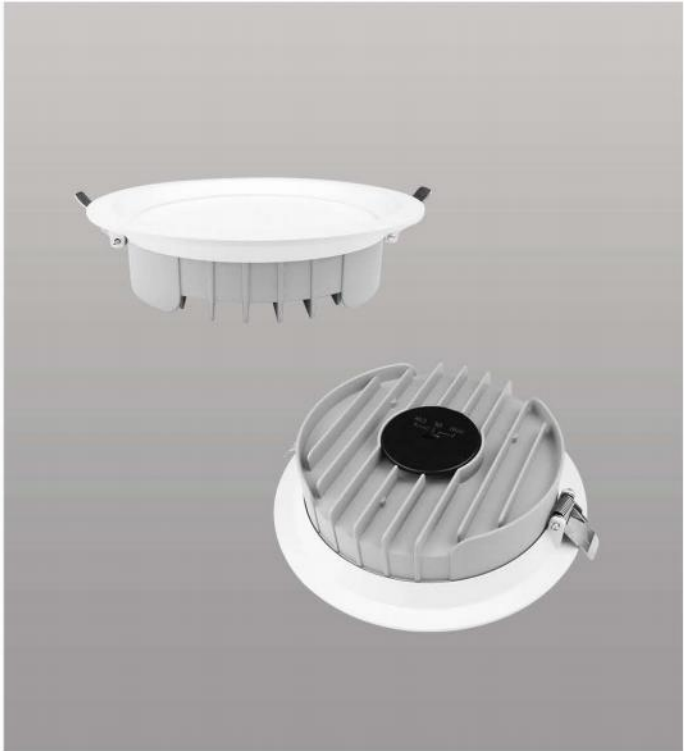
DL25 Downlight

Aluminum Light



- 1. Thin design for a sleek, modern look
- 2. Made from die-cast aluminum for superior heat dissipation
- 3. High luminous efficacy of up to 100lm/w for bright and efficient lighting
- 4. Available in multiple sizes to fit various applications.
- 5. Quality diffuser for even light distribution
- 6. Compatible with triac, DALI, and 0-10V dimming options

Finish ——— White Black

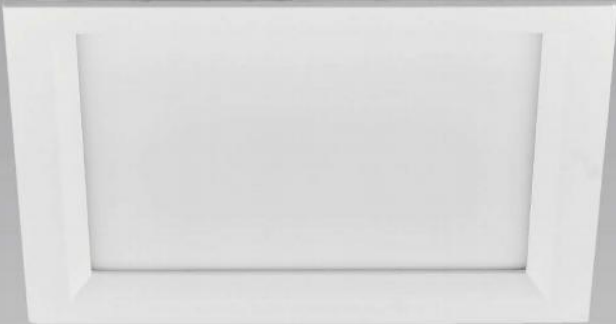


3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL25-70	8W	70lm/w	Ø 85×H36mm	Ø 70mm	IP20	0.17	48
	DL25-90	12W	80lm/w	Ø 100×H36mm	Ø 90mm	IP20	0.22	36
	DL25-100	15W	80lm/w	Ø 110×H36mm	Ø 100mm	IP20	0.32	24
	DL25-125	20W	90lm/w	Ø 140×H38mm	Ø 125mm	IP20	0.38	24
	DL25-140	24W	90lm/w	Ø 155×H38mm	Ø 140mm	IP20	0.41	18
	DL25-150	30W	90lm/w	Ø 165×H38mm	Ø 150mm	IP20	0.47	18
	DL25-200	40W	90lm/w	Ø 215×H41mm	Ø 200mm	IP20	0.67	12

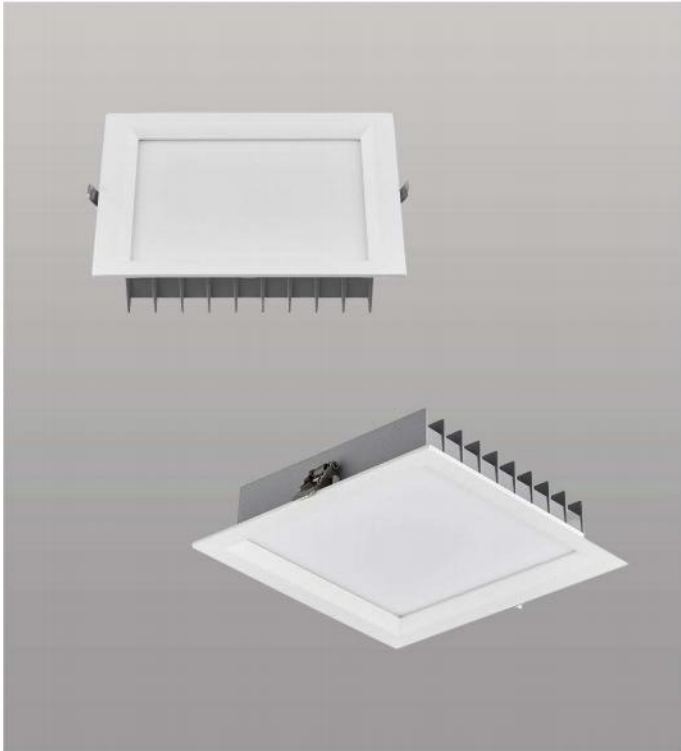
DL25-S Downlight

Aluminum Light



- 1. Die-cast aluminum body for superior heat dissipation
- 2. Modern square design that enhances contemporary interiors
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to suit different installation needs
- 5. High-quality diffuser for uniform light distribution
- 6. External driver for flexible installation and dimming options

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL25-90-S	12W	70lm/w	100×100×37mm	84×84-95×95mm	IP20	0.26	48
	DL25-100-S	15W	80lm/w	110×110×37mm	95×95-105×105mm	IP20	0.29	36
	DL25-125-S	24W	90lm/w	135×135×37mm	120×120-130×130mm	IP20	0.37	24
	DL25-150-S	30W	90lm/w	165×165×37mm	145×145-160×160mm	IP20	0.49	24
	DL25-200-S	40W	90lm/w	215×215×37mm	195×195-210×210mm	IP20	0.74	12

DL26 Downlight




- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL26-70	7W	70lm/w	Ø85xH36mm	Ø70mm	IP20	0.18	48
	DL26-90	12W	80lm/w	Ø100xH36mm	Ø90mm	IP20	0.23	36
	DL26-100	15W	80lm/w	Ø110xH36mm	Ø100mm	IP20	0.32	24
	DL26-125	20W	90lm/w	Ø140xH38mm	Ø125mm	IP20	0.37	24
	DL26-140	24W	90lm/w	Ø155xH38mm	Ø140mm	IP20	0.42	18
	DL26-150	30W	90lm/w	Ø165xH38mm	Ø150mm	IP20	0.47	18
	DL26-200	40W	90lm/w	Ø215xH41mm	Ø200mm	IP20	0.67	18

DL27 Downlight




- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL27-90	12W	80lm/w	Ø96xH71mm	Ø90mm	IP20	0.37	24
	DL27-100	18W	80lm/w	Ø106xH80mm	Ø100mm	IP20	0.43	24
	DL27-125	28W	90lm/w	Ø131xH93mm	Ø125mm	IP20	0.60	18
	DL27-155	36W	90lm/w	Ø170xH109mm	Ø155mm	IP20	0.94	12
	DL27-200	48W	90lm/w	Ø215xH130mm	Ø200mm	IP20	1.43	8

DL28 Downlight




- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL28-90-10	10W	90lm/w	Ø90×H70mm	Ø90mm	IP20	0.24	36
	DL28-90-12	12W	90lm/w	Ø170×H70mm	Ø90mm	IP20	0.25	6

DL29 Downlight




- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL29-75	12W	80lm/w	Ø85×H48mm	Ø75mm	IP20	0.25	36
	DL29-95	18W	80lm/w	Ø105×H59mm	Ø95mm	IP20	0.38	24
	DL29-120	24W	90lm/w	Ø130×H62mm	Ø120mm	IP20	0.48	18
	DL29-140	36W	90lm/w	Ø155×H62mm	Ø140mm	IP20	0.58	18
	DL29-160	42W	90lm/w	Ø175×H62mm	Ø160mm	IP20	0.67	18

DL30 Downlight

Aluminum Light



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL30-55	9W	80lm/w	Ø74xH40mm	Ø55mm	IP20	0.21	48
	DL30-75	12W	80lm/w	Ø84xH41mm	Ø75mm	IP20	0.27	36
	DL30-90	18W	90lm/w	Ø120xH42mm	Ø90mm	IP20	0.34	24
	DL30-120	24W	90lm/w	Ø151xH52mm	Ø120mm	IP20	0.55	18

DL30A Downlight

Aluminum Light



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL30A-55	9W	70lm/w	Ø75xH40mm	Ø55mm	IP20	0.23	36
	DL30A-75	12W	70lm/w	Ø100xH40mm	Ø75mm	IP20	0.29	36
	DL30A-90	18W	80lm/w	Ø125xH45mm	Ø90mm	IP20	0.36	24
	DL30A-120	24W	80lm/w	Ø150xH50mm	Ø120mm	IP20	0.57	18

DL30B Downlight

Aluminum Light



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL30B-55	9W	70lm/w	Ø75xH40mm	Ø55mm	IP20	0.22	24
	DL30B-75	12W	70lm/w	Ø100xH40mm	Ø75mm	IP20	0.30	24
	DL30B-90	18W	80lm/w	Ø125xH45mm	Ø90mm	IP20	0.42	18
	DL30B-120	24W	80lm/w	Ø150xH50mm	Ø120mm	IP20	0.51	18

DL31 Downlight

Aluminum Light



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL31-160	40W	80lm/w	Ø170xH70mm	Ø70mm	IP20	0.92	8

DL36 Downlight



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———— White Black



3CCT ———— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL36-75	7W/8W	80lm/w	Ø83xH46mm	Ø75mm	IP20	0.26	36
	DL36-95	13W	80lm/w	Ø98xH49mm	Ø95mm	IP20	0.32	24

DL37 Downlight



- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Adjustable tilt up to 30°
- 6. Polycarbonate optical lens, CRI>80
- 7. Optional to be dimming and non-dimming
- 8. CCT switchable on the driver and help you to reduce the stock

Finish ———— White Black



3CCT ———— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL37-65	7W	80lm/w	Ø80xH37mm	Ø65mm	IP20	0.23	36
	DL37-75	9W	90lm/w	Ø90xH45mm	Ø75mm	IP20	0.27	36
	DL37-95	15W	90lm/w	Ø105xH50mm	Ø95mm	IP20	0.33	24

DL38 Downlight

Aluminum Light




- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL38-02	7W	70lm/w	Ø80xH92mm	Ø72mm	IP20	0.33	24
	DL38-03	12W	80lm/w	Ø88xH92mm	Ø90mm	IP20	0.35	24
	DL38A-03	12W	90lm/w	Ø98xH94mm	Ø90mm	IP20	0.35	24

DL39 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL39-02	12W	80lm/w	Ø82xH93mm	Ø75mm	IP20	0.34	24

DL42 Downlight



- 1. Die-cast aluminum construction for optimal heat dissipation
- 2. Optical reflector cup for precise light distribution
- 3. High luminous efficacy of up to 100lm/w for efficient lighting
- 4. Available in various sizes to meet different needs.
- 5. High-quality diffuser for even light spread
- 6. External driver for versatile installation and dimming capabilities

Finish ———  White  Black



3CCT ———  CW NW WW

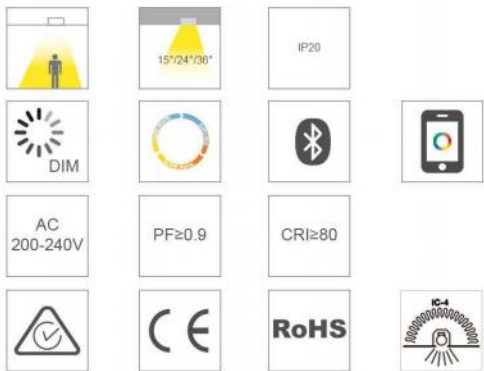
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL42-45	6W	90lm/w	50×50×H66mm	45×45mm	IP20	0.22	36
	DL42-100	12W	90lm/w	105×50×H66mm	95×45mm	IP20	0.29	30
	DL42-235	30W	90lm/w	245×50×H66mm	235×45mm	IP20	0.51	18


DL43 Downlight




- 1. Durable die-cast aluminum body profile
- 2. Square bezel combined with a round body to suit a round cut out
- 3. Stylish white or black powder coat finish
- 4. High output LED optics
- 5. Optional to different beam angle,
- 6. Polycarbonate optical lens, CRI>80
- 7. Optional to be dimming and non-dimming
- 8. CCT switchable and help you to reduce the stock

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL43-02	10W	80lm/w	90×90×H84mm	70×70mm	IP20	0.36	24

DL45 Downlight



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish  White  Black

DL46 Downlight

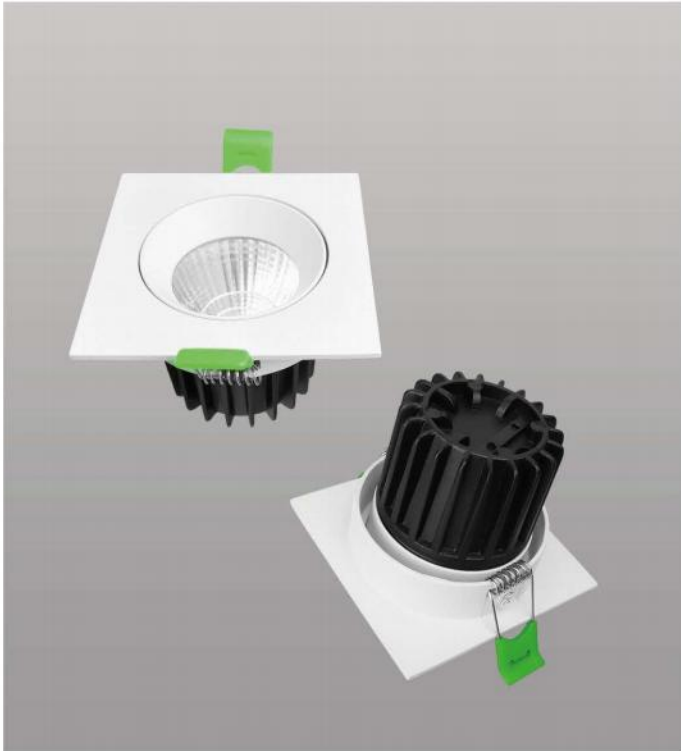


- 1. Durable die-cast aluminum body profile
- 2. Square bezel combined with a round body to suit a round cut out
- 3. Stylish white or black powder coat finish
- 4. High output LED optics
- 5. Optional to different beam angle,
- 6. Polycarbonate optical lens, CRI>80
- 7. Optional to be dimming and non-dimming
- 8. CCT switchable and help you to reduce the stock


Finish  White  Black




3CCT  CW NW WW



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL45-03	12W	85lm/w	Ø100xH75mm	Ø90mm	IP20	0.--	--

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL46-03	12W	80lm/w	100x100x70mm	Ø85mm	IP20	0.30	24

DL48 Downlight




- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL48-03	12W	80lm/w	Ø98xH75mm	Ø90mm	IP20	0.37	24

DL49 Downlight




- 1. Durable die-cast aluminum body profile
- 2. Square bezel combined with a round body to suit a round cut out
- 3. Stylish white or black powder coat finish
- 4. High output LED optics
- 5. Optional to different beam angle,
- 6. Polycarbonate optical lens, CRI>80
- 7. Optional to be dimming and non-dimming
- 8. CCT switchable and help you to reduce the stock

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL49-02	12W	75lm/w	82x82x82mm	Ø75mm	IP20	0.38	24

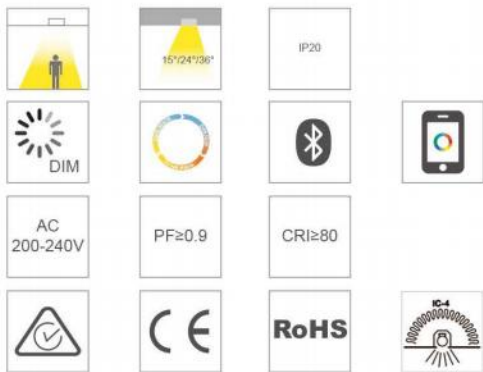
DL50 Downlight

Aluminum Light




- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL50-02	12W	80lm/w	Ø81xH95mm	Ø75mm	IP20	0.34	24

DL51 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ————  White  Black

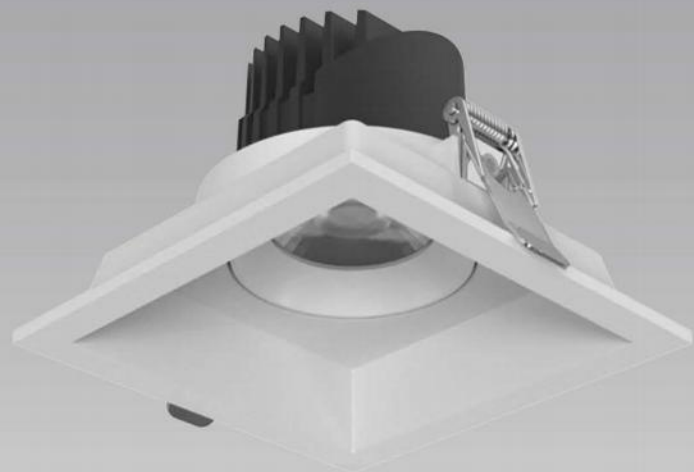


3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL51-55	6W	70lm/w	Ø67xH50mm	Ø55mm	IP20	0.19	36
	DL51-75	12W	80lm/w	Ø90xH72mm	Ø75mm	IP20	0.27	30
	DL51-95	18W	90lm/w	Ø113xH85mm	Ø95mm	IP20	0.45	20

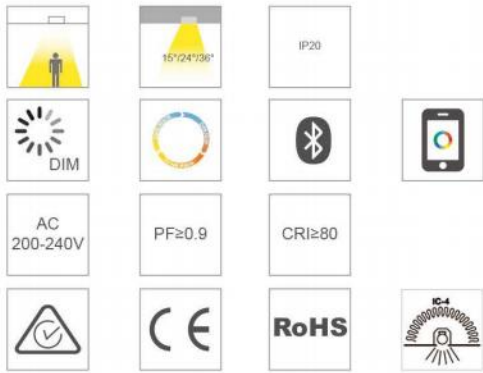
DL51-S Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL51-90-S	12W	80lm/w	102×102×H70mm	90×90mm	IP20	0.25	30
	DL51-195-S	24W	80lm/w	205×105×H75mm	159×90mm	IP20	0.31	30
	DL51-105-S	18W	90lm/w	120×120×H86mm	105×105mm	IP20	0.50	20
	DL51-125-S	36W	90lm/w	235×120×H86mm	225×120mm	IP20	0.93	10

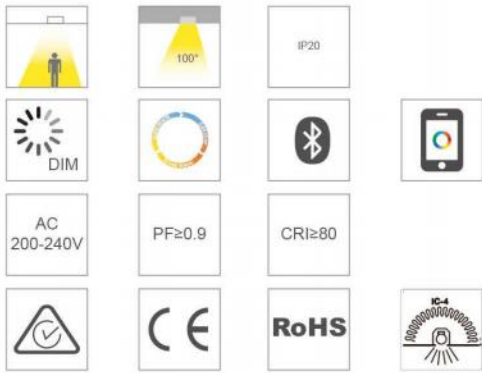
DL55 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to SMD and COB
- 7. Optional to be dimming and non-dimming
- 8. CCT switchable on the driver and help you to reduce the stock

Finish ——— White Black

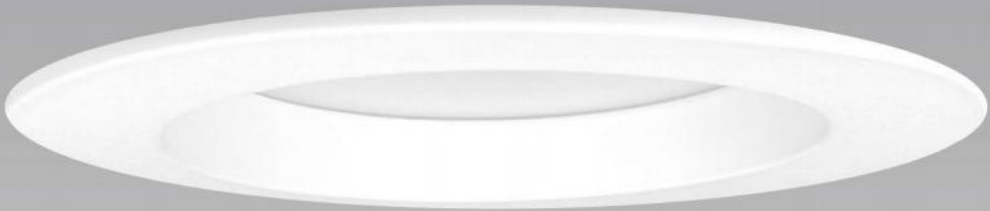


3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL55-02	6W	80lm/w	Ø90×H50mm	Ø70mm	IP20	0.27	36
	DL55-03	10W	80lm/w	Ø105×H53mm	Ø90mm	IP20	0.38	24
	DL55-04	15W	80lm/w	Ø120×H62mm	Ø100mm	IP20	0.55	18
	DL55-05	18W	80lm/w	Ø160×H73mm	Ø140mm	IP20	0.77	12
	DL55-06	28W	80lm/w	Ø190×H82mm	Ø170mm	IP20	1.05	10
	DL55-08	40W	80lm/w	Ø220×H95mm	Ø200mm	IP20	1.38	8

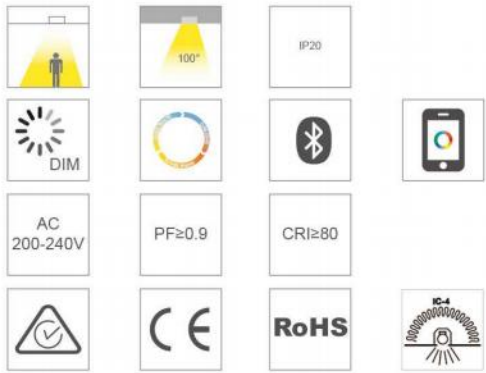
DL58 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL58-90	12W	80lm/w	Ø120xH47mm	Ø90mm	IP20	0.33	24
	DL58-120	18W	80lm/w	Ø148xH47mm	Ø120mm	IP20	0.44	18
	DL58-150	24W	90lm/w	Ø192xH44mm	Ø150mm	IP20	0.60	12

DL64 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL64-45-05	5W	100lm/w	Ø52xH52mm	Ø45mm	IP20	0.23	36
	DL64-55-08	8W	100lm/w	Ø62xH55mm	Ø55mm	IP20	0.26	36
	DL64-65-12	12W	100lm/w	Ø72xH58mm	Ø65mm	IP20	0.33	24
	DL64-75-12	12W	100lm/w	Ø82xH60mm	Ø75mm	IP20	0.32	24
	DL64-95-20	20W	100lm/w	Ø102xH65mm	Ø95mm	IP20	0.50	24
	DL64-95-30	30W	100lm/w	Ø102xH78mm	Ø95mm	IP20	0.52	18
	DL64-125-40	40W	100lm/w	Ø133xH91mm	Ø125mm	IP20	0.59	18

DL64A Downlight



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

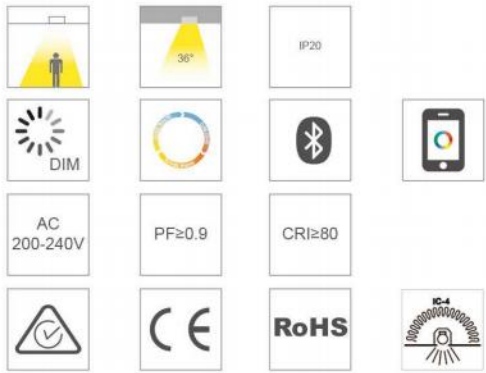
Finish ——— White Black

DL67 Downlight

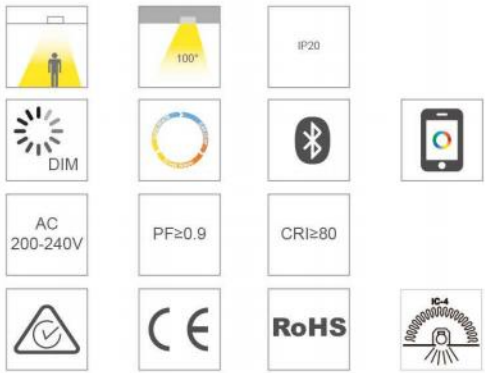


- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL64A-45	5W	100lm/w	Ø52xH52mm	Ø45mm	IP20	0.24	36
	DL64A-55	8W	100lm/w	Ø62xH55mm	Ø55mm	IP20	0.27	36
	DL64A-65	12W	100lm/w	Ø72xH58mm	Ø65mm	IP20	0.28	24
	DL64A-75	12W	100lm/w	Ø82xH60mm	Ø75mm	IP20	0.39	18

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL67-40	40W	110lm/w	Ø240xH145mm	215x125mm	IP20	1.36	8

DL71 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL71-55	7W	80lm/w	Ø64xH72mm	Ø55mm	IP20	0.29	36
	DL71-80	12W	80lm/w	Ø85xH88mm	Ø80mm	IP20	0.41	24
	DL71-95	20W	90lm/w	Ø101xH124mm	Ø95mm	IP20	0.72	12

DL72 Downlight

Aluminum Light



- 1. Durable die-cast aluminum body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL71-55	10W	70lm/w	Ø60xH73mm	Ø55mm	IP20	0.29	36
	DL71-80	12W	80lm/w	Ø81xH88mm	Ø80mm	IP20	0.41	24
	DL71-95	20W	90lm/w	Ø101xH123mm	Ø95mm	IP20	0.72	12

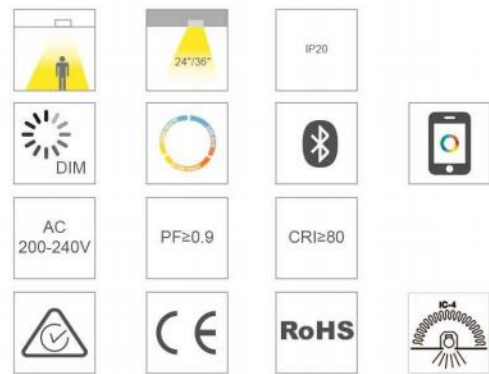
DL78 Downlight

Aluminum Light




- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL78-55	6W	80lm/w	Ø68xH40mm	Ø55mm	IP20	0.21	48
	DL78-75	10W	80lm/w	Ø90xH55mm	Ø75mm	IP20	0.28	48
	DL78-95	15W	80lm/w	Ø110xH70mm	Ø95mm	IP20	0.41	24

DL85 Downlight

Aluminum Light




- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish ————  White  Black



3CCT ————  CW NW WW

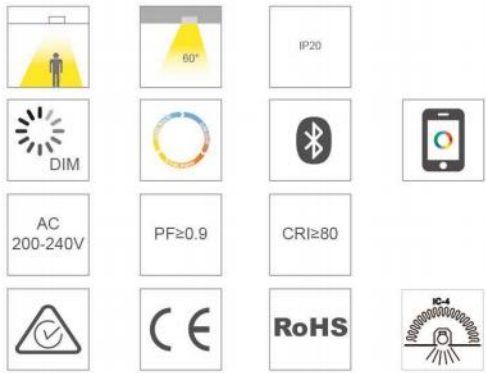
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL85-04	20W	90lm/w	Ø130xH98mm	Ø120mm	IP20	0.55	12

DL86 Downlight



- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish ——— White Black



3CCT ——— CW NW WW

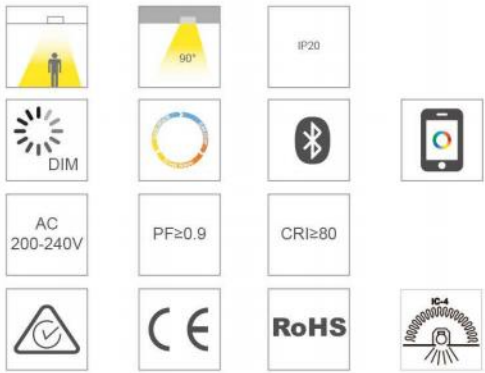
	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL86-100	10W	100lm/w	Ø113xH60mm	Ø100mm	IP20	0.25	36
	DL86-130	15W	100lm/w	Ø145xH74mm	Ø130mm	IP20	0.31	24
	DL86-155	15/20W	110lm/w	Ø174xH87mm	Ø155mm	IP20	0.38	24
	DL86-170	20/25W	120lm/w	Ø205xH100mm	Ø170mm	IP20	0.56	18
	DL86-210	28/35W	120lm/w	Ø232xH112mm	Ø210mm	IP20	0.64	18

DL87 Downlight



- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle
- 5. Polycarbonate optical lens, CRI>80
- 6. Optional to be dimming and non-dimming
- 7. CCT switchable and help you to reduce the stock

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	DL87-100	10W	100lm/w	Ø113xH49mm	Ø100mm	IP20	0.25	36
	DL87-130	15W	100lm/w	Ø145xH58mm	Ø130mm	IP20	0.31	24
	DL87-155	15/20W	110lm/w	Ø174xH65mm	Ø155mm	IP20	0.56	18
	DL87-210	28/35W	120lm/w	Ø232xH77mm	Ø210mm	IP20	0.64	18



Surface Mounted Downlight

SDL01 Surface Mounted Downlight



- 1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- 2. Deep recessed angle fitting provides excellent glare control and light distribution
- 3. High output LED optics, with a changeable multi-faceted reflector system
- 4. Optional to be dimmable and non-dimmable
- 5. Available in 24° and 36° beam angle options

Finish ——— White Black



15°/24°/36°

IP65

DIM

3CCT

AC 200-240V

PF≥0.9

CRI≥80

BT

Smartphone

Safety

CE

RoHS

3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	Cut-out(mm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL01-88	10W	60lm/w	Ø88xH91mm	Ø25mm	IP65	0.74	12
	SDL01-80-S	10W	60lm/w	80x80x91mm	Ø25mm	IP65	0.78	12
	SDL01-110-S	20W	70lm/w	110x110x91mm	Ø25mm	IP65	1.25	8

SDL02 Surface Mounted Downlight



- 1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- 2. Deep recessed angle fitting provides excellent glare control and light distribution
- 3. High output LED optics, with a changeable multi-faceted reflector system
- 4. Optional to be dimmable and non-dimmable
- 5. Available in 36° and 60° beam angle options
- 6. IP65 rated providing protection from water projected from a nozzle making it suitable for bathroom zone, balcony etc.

Finish ——— White Black



20°/40°/60°

IP20

DIM

3CCT

AC 200-240V

PF≥0.9

CRI≥80

BT

Smartphone

Safety

CE

RoHS

3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL02-90	15W	80lm/w	Ø90xH90mm	IP20	0.37	24
	SDL02-110	24W	90lm/w	Ø110xH110mm	IP20	0.50	18
	SDL02-130	35W	100lm/w	Ø130xH130mm	IP20	0.71	18
	SDL02-170	42W	100lm/w	Ø170xH170mm	IP20	1.12	12
	SDL02-195	55W	100lm/w	Ø195xH190mm	IP20	1.50	12

SDL03 Surface Mounted Downlight



- 1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- 2. Deep recessed angle fitting provides excellent glare control and light distribution
- 3. High output LED optics, with a changeable multi-faceted reflector system
- 4. Optional to be dimmable and non-dimmable
- 5. Available in 36° and 60° beam angle options
- 6. IP65 rated providing protection from water projected from a nozzle making it suitable for bathroom zone, balcony etc.

Finish ———  White  Black




13°/24°/36°/60°


IP20


DIM


AC 200-240V



PF≥0.9


CRI≥80


RoHS


CE

3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL03-93	20W	100lm/w	Ø93xH113mm	IP20	0.68	12

SDL04 Surface Mounted Downlight



- 1. Durable die-cast aluminium body profile
- 2. Stylish white or black powder coat finish
- 3. High output LED optics
- 4. Optional to different beam angle,
- 5. Polycarbonate optical lens, CRI>80
- 6. Add motion sensor according to the requirements
- 7. CCT switchable and help you to reduce the stock

Finish ———  White  Black




15°/24°/36°/50°


IP20


DIM


AC 200-240V


PF≥0.9


CRI≥80


RoHS


CE

3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL04-45	5W	70lm/w	Ø45xH52mm	IP20	0.21	48
	SDL04-55	7W	70lm/w	Ø55xH67mm	IP20	0.24	36
	SDL04-65	9W	80lm/w	Ø65xH67mm	IP20	0.26	36
	SDL04-75	12W	90lm/w	Ø75xH75mm	IP20	0.31	24

SDL05 Surface Mounted Downlight




- 1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- 2. Deep recessed angle fitting provides excellent glare control and light distribution
- 3. High output LED optics, with a changeable multi-faceted reflector system
- 4. Optional to be dimmable and non-dimmable
- 5. Available in 36° and 60° beam angle options
- 6. IP65 rated providing protection from water projected from a nozzle making it suitable for bathroom zone, balcony etc.

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL05-75-10	10W	80lm/w	Ø75x100mm	IP65	0.38	24
	SDL05-75-15	15W	80lm/w	Ø75x152mm	IP65	0.46	24
	SDL05-95-15	15W	90lm/w	Ø95x100mm	IP65	0.56	18
	SDL05-95-20	20W	90lm/w	Ø95x152mm	IP65	0.63	12
	SDL05-115-30	30W	100lm/w	Ø115x152mm	IP65	0.82	12
	SDL05-140-40	40W	100lm/w	Ø140x162mm	IP65	1.47	12
	SDL05-170-50	50W	110lm/w	Ø170x182mm	IP65	2.31	8
	SDL05-205-80	80W	110lm/w	Ø205x212mm	IP65	3.75	4

SDL06 Surface Mounted Downlight




- 1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- 2. Deep recessed angle fitting provides excellent glare control and light distribution
- 3. High output LED optics, with a changeable multi-faceted reflector system
- 4. Optional to be dimmable and non-dimmable
- 5. Available in 36° and 60° beam angle options
- 6. IP65 rated providing protection from water projected from a nozzle making it suitable for bathroom zone, balcony etc.

Finish ————  White  Black



3CCT ————  CW NW WW

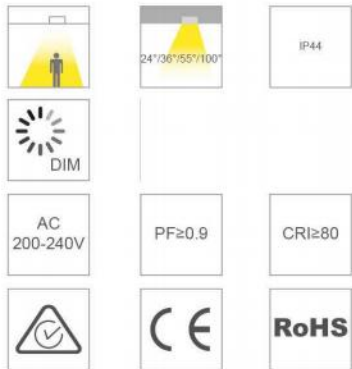
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL06-74	15W	70lm/w	Ø74xH147mm	IP20	0.45	24
	SDL06-96	24W	80lm/w	Ø96xH152mm	IP20	0.64	18
	SDL06-115	30W	80lm/w	Ø115xH135mm	IP20	0.84	12
	SDL06-140	40W	90lm/w	Ø140xH160mm	IP20	1.28	8
	SDL06-171	60W	90lm/w	Ø170xH198mm	IP20	1.96	4
	SDL06-186	80W	100lm/w	Ø186xH214mm	IP20	2.72	4

SDL07 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish  White  Black



3CCT  CW NW WW

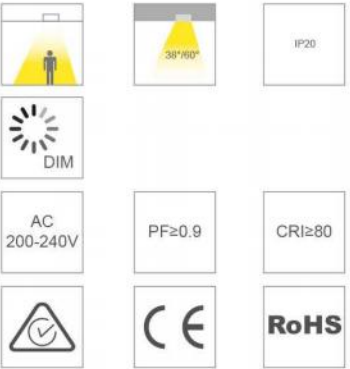
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL07-74	12W	80lm/w	Ø74xH100mm	IP44	0.38	24
	SDL07-94	24W	90lm/w	Ø94xH117mm	IP44	0.59	18
	SDL07-118	36W	90lm/w	Ø119xH137mm	IP44	0.74	12

SDL08 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish  White  Black



3CCT  CW NW WW

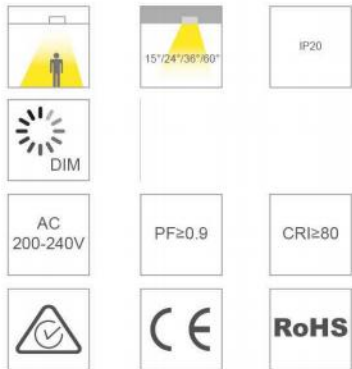
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL08-78	12W	70lm/w	Ø78xH90mm	IP20	0.39	24
	SDL08-78-S	12W	70lm/w	78x78xH90mm	IP20	0.45	24

SDL09 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL09-85	12W	70lm/w	Ø85xH103mm	IP20	0.35	24
	SDL09-100	18W	80lm/w	Ø100xH118mm	IP20	0.50	18
	SDL09-115	28W	90lm/w	Ø115xH130mm	IP20	0.71	12

SDL10 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish ———  White  Black



3CCT ———  CW NW WW

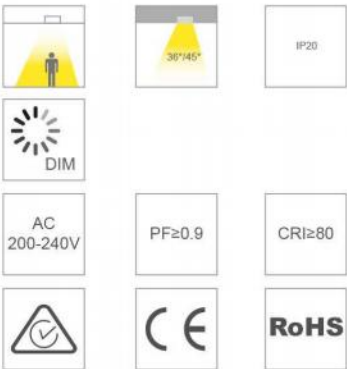
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL10-70	15W	80lm/w	Ø70xH105mm	IP20	0.42	24
	BG550SHX	8.5W	60lm/w	Ø80xH118mm	IP20	0.50	18
	SDL10-90	24W	80lm/w	Ø90xH125mm	IP20	0.72	12
	BG900SHX	16.5W	70lm/w	Ø96xH130mm	IP20	0.78	12
	SDL10-120	35W	90lm/w	Ø120xH150mm	IP20	1.15	8

SDL11 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish  White  Black



3CCT  CW NW WW

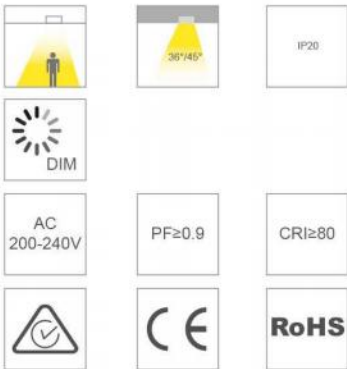
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL11-42	7W	70lm/w	Ø45xH158mm	IP20	0.28	40
	SDL11-62	15W	70lm/w	Ø62xH150mm	IP20	0.40	30
	SDL11-83	24W	80lm/w	Ø83xH168mm	IP20	0.79	20

SDL12 Surface Mounted Downlight




- 1. IP54 rated for dust and water resistance
- 2. Available in black and white finishes
- 3. Offers four beam angles: 15°, 24°, 36°, 60°
- 4. Comes in multiple sizes for different needs
- 5. Supports triac, DALI, and 0-10V dimming
- 6. Easy to install with a surface mount design

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	SDL12-40	10W	70lm/w	Ø40xH117mm	IP20	0.18	24
	SDL12-60	20W	80lm/w	Ø60xH150mm	IP20	0.42	18
	SDL12-70	30W	90lm/w	Ø70xH165mm	IP20	0.57	12



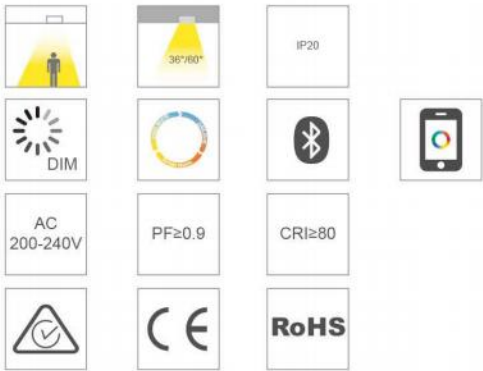
Track Light

TL01 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL01-45	10W	90lm/w	Ø45xH115mm	IP20	0.22	36
	TL01-55	20W	90lm/w	Ø55xH135mm	IP20	0.33	24
	TL01-65	30W	90lm/w	Ø65xH165mm	IP20	0.49	24

TL02 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24° and 36° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL02-55	15W	90lm/w	Ø55xH138mm	IP20	0.27	36
	TL02-65	24W	90lm/w	Ø65xH143mm	IP20	0.34	24
	TL02-75	30W	90lm/w	Ø75xH157mm	IP20	0.42	24
	TL02-85	35W	90lm/w	Ø85xH167mm	IP20	0.51	24

TL03 Track Light



- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———— White Black



3CCT ———— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL03-55	15W	70lm/w	Ø55xH138mm	IP20	0.22	36
	TL03-65	24W	80lm/w	Ø65xH143mm	IP20	0.31	24
	TL03-75	30W	80lm/w	Ø75xH157mm	IP20	0.40	24
	TL03-85	35W	90lm/w	Ø85xH167mm	IP20	0.49	24

TL04 Track Light



- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical adjustment
- 2. White or black powder coated finish
- 3. Opal polycarbonate diffuser
- 4. High output LED optics,
- 5. Adjustable beam distribution 15 - 55 degree
- 6. Optional to be triac dimming, 0-10V dimming and non-dimming

Finish ———— White Black



3CCT ———— CW NW WW

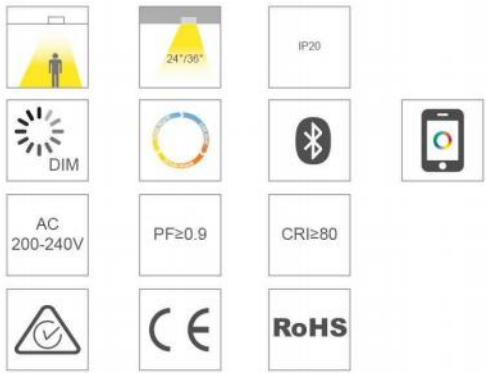
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL04-65	18W	80lm/w	Ø65xH135mm	IP20	0.50	24
	TL04-75	24W	90lm/w	Ø75xH150mm	IP20	0.69	24
	TL04-85	30W	90lm/w	Ø85xH165mm	IP20	0.90	12

TL05 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———  White  Black



3CCT ———  CW NW WW

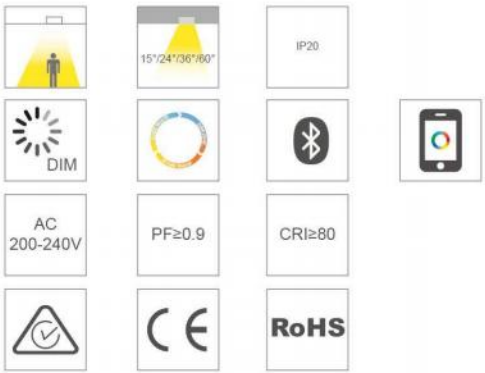
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL05-55	15W	70lm/w	Ø55xH120mm	IP20	0.39	30
	TL05-65	20W	70lm/w	Ø65xH128mm	IP20	0.48	20
	TL05-75	30W	80lm/w	Ø75xH150mm	IP20	0.55	20
	TL05-85	35W	80lm/w	Ø85xH160mm	IP20	0.67	16
	TL05-95	40W	90lm/w	Ø95xH170mm	IP20	0.79	16

TL06 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———  White  Black



3CCT ———  CW NW WW

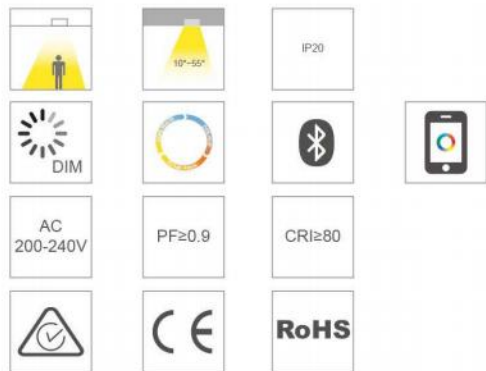
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL06-55	15W	80lm/w	Ø55xH120mm	IP20	0.33	30
	TL06-65	20W	80lm/w	Ø65xH128mm	IP20	0.43	20
	TL06-75	30W	80lm/w	Ø75xH150mm	IP20	0.53	20
	TL06-85	35W	80lm/w	Ø85xH160mm	IP20	0.66	16
	TL09-95	40W	90lm/w	Ø95xH170mm	IP20	0.77	16

TL07 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL07-55	15W	70lm/w	Ø55xH140mm	IP20	0.58	24
	TL07-65	20W	80lm/w	Ø65xH147mm	IP20	0.65	24
	TL07-75	30W	80lm/w	Ø75xH159mm	IP20	0.92	18
	TL07-85	35W	80lm/w	Ø85xH165mm	IP20	1.07	12
	TL07-95	40W	80lm/w	Ø95xH170mm	IP20	1.13	8

TL08 Track Light



- 1. Available in multiple sizes for various lighting needs
- 2. 3-CCT Switchable
- 3. Suitable for both residential and commercial use
- 4. Easy installation on standard track lighting systems
- 5. Energy-efficient LED technology for long-lasting performance

Finish ——— White Black



3CCT ——— CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL08-51	10W	70lm/w	Ø50xH120mm	IP20	0.30	40
	TL08-61	15W	80lm/w	Ø60xH145mm	IP20	0.41	40
	TL08-71	20W	80lm/w	Ø70xH168mm	IP20	0.53	20
	TL08-81	24W	100lm/w	Ø80xH168mm	IP20	0.64	20
	TL08-91	35W	100lm/w	Ø90xH168mm	IP20	0.76	12

TL09 Track Light



- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ———  White  Black












3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL09-01	10W	70lm/w	Ø41xH180mm	IP20	0.25	20

TL10 Track Light



- 1. Available in multiple sizes to meet different lighting needs
- 2. Suitable for both residential and commercial settings
- 3. Easy to install on standard track lighting systems
- 4. Energy-efficient LED technology for cost-effective lighting
- 5. Modern design complements a wide range of interior styles
- 6. Provides consistent, high-quality illumination

Finish ———  White  Black












3CCT ———  CW NW WW

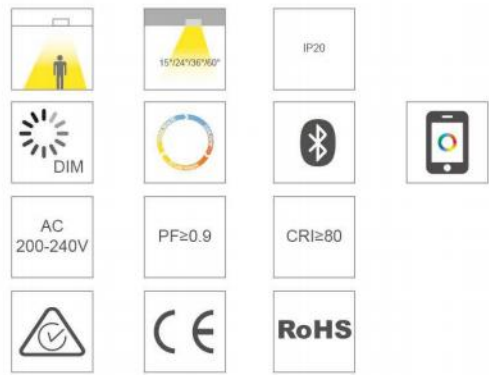
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL10-51	10W	80lm/w	Ø50xH120mm	IP20	0.28	36
	TL10-61	15W	80lm/w	Ø60xH145mm	IP20	0.38	36
	TL10-71	20W	90lm/w	Ø70xH168mm	IP20	0.51	24
	TL10-81	24W	90lm/w	Ø80xH168mm	IP20	0.63	24
	TL10-91	35W	100lm/w	Ø90xH168mm	IP20	0.74	12

TL11 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ————  White  Black



3CCT ————  CW NW WW

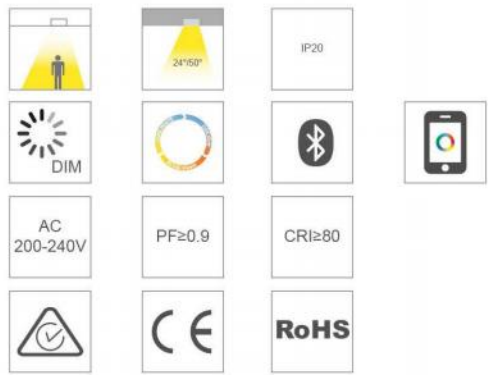
	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL11-75-10	10W	80lm/w	Ø75x37x130mm	IP20	0.41	20
	TL11-75-18	18W	90lm/w	Ø105x40x147mm	IP20	0.56	20

TL12 Track Light




- 1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
- 2. White or black powder coated finish
- 3. High output LED optics, CCT 3000K, 4000K, 5000K
- 4. Available in 15°, 24°, 36° and 50° beam angle options
- 5. Integral constant current non-dimmable driver

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TL12-75-10	10W	70lm/w	Ø75x33x130mm	IP20	0.41	20
	TL12-75-18	18W	70lm/w	Ø105x33x147mm	IP20	0.55	20



Ceiling Light

CL01 Ceiling Light

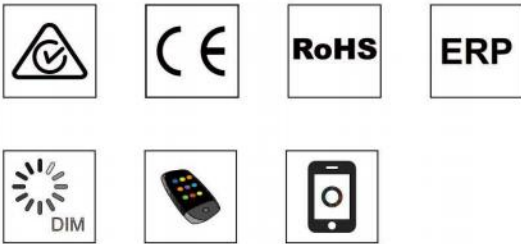



- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- Power switchable, easily to help you to reduce the stock

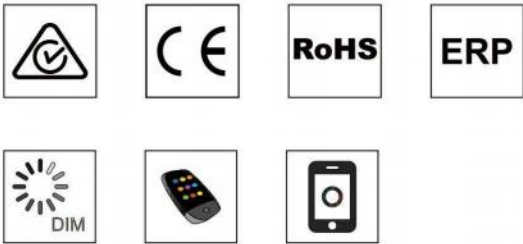
CL02 Ceiling Light




- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- Power switchable, easily to help you to reduce the stock



	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL01-230	18W	80lm/w	Ø230xH40mm	IP20	0.32	20
	CL01-300	24W	80lm/w	Ø300xH40mm	IP20	0.54	20
	CL01-400	32W	80lm/w	Ø400xH40mm	IP20	0.96	12
	CL01-500	40W	80lm/w	Ø500xH40mm	IP20	1.36	8



	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL02-200	15W	80lm/w	Ø200xH40mm	IP45	0.36	20
	CL02-280	24W	80lm/w	Ø280xH40mm	IP45	0.64	20
	CL02-380	32W	90lm/w	Ø380xH40mm	IP45	1.07	10
	CL02-480	40W	100lm/w	Ø480xH40mm	IP45	1.67	10

CL03 Ceiling Light



- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- Power switchable, easily to help you to reduce the stock

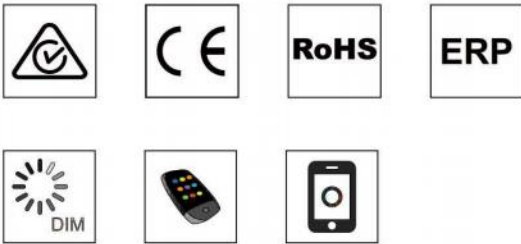
Finish  White  Black

CL04 Ceiling Light

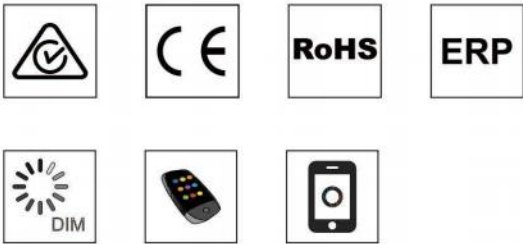


- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- Power switchable, easily to help you to reduce the stock
- Super slim design, only 25mm height


Finish  White  Black




3CCT  CW NW WW

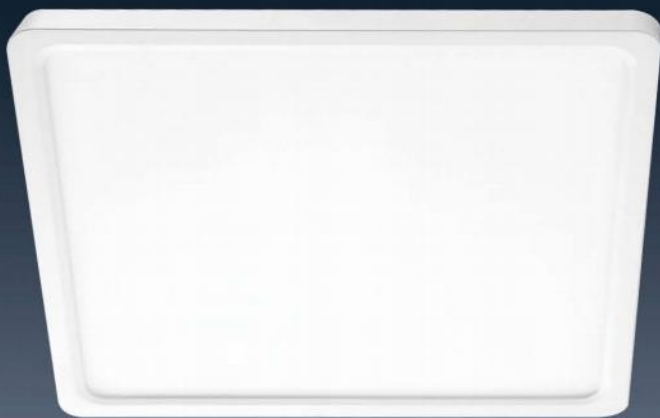


3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL03-230	12W	80lm/w	Ø230xH40mm	IP20	0.41	10
	CL03-300	18W	80lm/w	Ø400xH40mm	IP20	0.57	10
	CL03-380	28W	80lm/w	Ø500xH40mm	IP20	0.77	10

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL04-230	18W	90lm/w	Ø230xH25mm	IP20	0.49	20
	CL04-300	24W	90lm/w	Ø300xH25mm	IP20	0.66	20
	CL04-400	32W	100lm/w	Ø400xH25mm	IP20	0.87	10

CL04-CB Ceiling Light



- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- Power switchable, easily to help you to reduce the stock
- Super slim design, only 25mm height

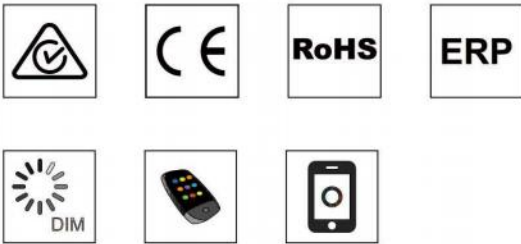
Finish  White  Black

CL05 Ceiling Light

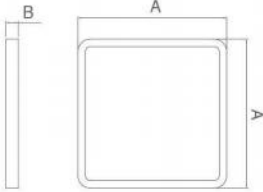


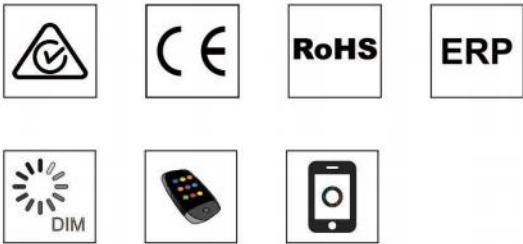
- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Optional to be dimmable and non-dimmable
- PA10 terminal on the light, easy for installation
- IP54 rated, application to balcony, corridor etc.

Finish  White  Black




3CCT 
CW NW WW

	Code	Watt	Lumen(±5)	Size(AxAxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL04-230-CB	18W	90lm/w	230x230xH25mm	IP20	0.59	20
	CL04-300-CB	24W	90lm/w	300x300xH25mm	IP20	0.88	20
	CL04-400-CB	32W	100lm/w	400x400xH25mm	IP20	1.58	10



3CCT 
CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL05-230	18W	90lm/w	Ø230xH55mm	IP20	0.35	20
	CL05-300	24W	90lm/w	Ø300xH60mm	IP20	0.48	20
	CL05-380	30W	100lm/w	Ø400xH60mm	IP20	0.74	10

CL06 Ceiling Light



- 1. Adjustable color temperature to create the perfect ambience
- 2. Two installation options: recessed or surface-mounted
- 3. Adjustable cut-out size for seamless recessed installation
- 4. Optional microwave sensor for added convenience
- 5. Available in triac dimmable or non-dimmable versions
- 6. Ultra-thin design with a height of just 20mm for a sleek appearance

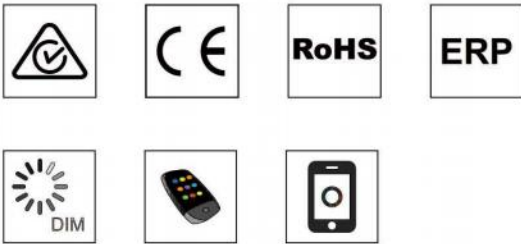
Finish ———  White  Black

CL07 Ceiling Light

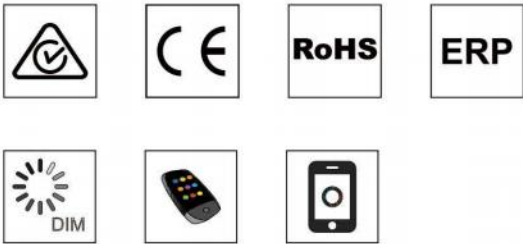


- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- High efficiency SMD LED chips, CRI > 80
- Double insulation
- Optional to be dimmable and non-dimmable
- Quality opal acrylic diffuser
- The ring can be replaced by yourself, optional to be white and black


Finish ———  White  Black




3CCT ———  CW NW WW



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL06-155	9W	70lm/w	Ø155xH20mm	IP20	0.20	40
	CL06-175	12W	80lm/w	Ø175xH20mm	IP20	0.26	40
	CL06-225	18W	90lm/w	Ø225xH25mm	IP20	0.40	20
	CL06-300	24W	90lm/w	Ø300xH25mm	IP20	0.66	15

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	CL07-230	18W	90lm/w	Ø225xH35mm	IP20	0.45	10
	CL07-300	18W	100lm/w	Ø300xH35mm	IP20	0.51	10
	CL07-380	30W	100lm/w	Ø380xH35mm	IP20	0.75	10

Wall light



WL01 Wall Light



- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

Finish ————  White  Black

WL02 Wall Light



- 1. UV resistant plastic material
- 2. Clear tempered glass cover, SMD chip, high lumens efficiency, up to 89lm/w
- 3.Up and down light distribution
- 4. CCT switchable, help you to reduce the stock.
- 5. Special installation way, easy to be installed.
- 6. Very high cost effective

Finish ————  White  Black











3CCT ———— 
CW NW WW



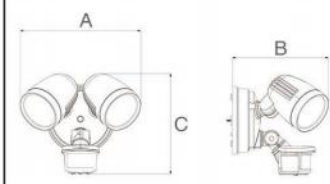


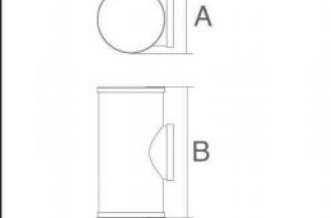






3CCT ———— 
CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL01-02	12W	100lm/w	193x179x162mm	IP54	0.53	18
	WL01-02-PIR	2x12W	100lm/w	193x179x162mm	IP54	0.62	18

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL02-02	18W	100lm/w	Ø80x180mm	IP54	0.35	20

WL03 Wall Light




- 1. UV resistant plastic material
- 2. Clear tempered glass cover, SMD chip, high lumens efficiency, up to 89lm/w
- 3. Up and down light distribution
- 4. CCT switchable, help you to reduce the stock
- 5. Special installation way, easy to be installed
- 6. Very high cost effective

Finish ———  White  Black



3CCT ———  CW NW WW

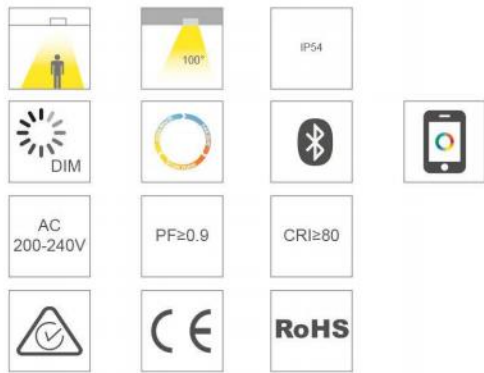
	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL03-02	18W	100lm/w	80x80x173mm	IP54	0.34	20


WL04 Wall Light

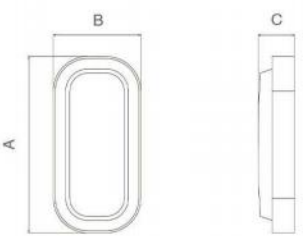


- 1. IP54 rating protects against dust and water splashes
- 2. PA10 waterproof junction box for durability
- 3. PC diffuser ensures soft, even light
- 4. 3-CCT switchable for adjustable color temperature
- 5. Modern square design adds elegance to any space

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL04-01	12W	80lm/w	254x125x50mm	IP54	0.24	32

WL05 Wall Light



- 1.IP54 rating for protection against dust and water splashes
- 2.PA10 waterproof junction box for enhanced durability
- 3.PC diffuser for soft and even light distribution
- 4.3-CCT switchable for adjustable color temperature
- 5.Elegant design suitable for both indoor and outdoor applications

Finish ————  White  Black



3CCT ————  CW NW WW

A	B	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
		WL05-01	12W	80lm/w	Ø250xH50mm	IP54	0.31	32

WL06 Wall Light





- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3.SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

Finish ————  White  Black



3CCT ————  CW NW WW

A	B	C	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
			WL06-02	24W	100lm/w	257x175x110mm	IP65	0.--	--
			WL06-02-PIR	24W	100lm/w	257x175x140mm	IP65	0.57	--

WL07 Wall Light



- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

Finish ———— White Black

WL08 Wall Light

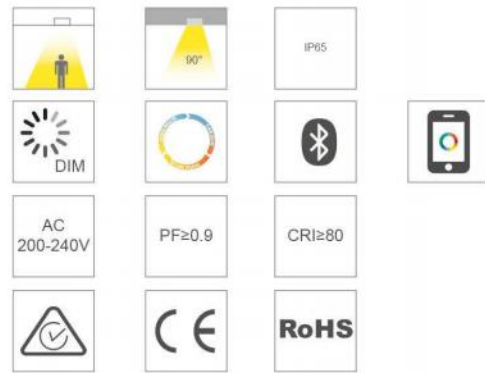


- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

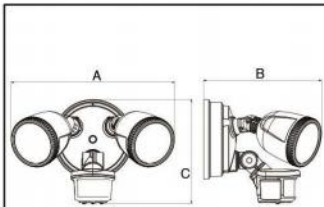
Finish ———— White Black



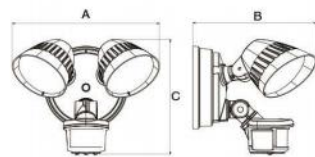
3CCT ———— CW NW WW



3CCT ———— CW NW WW



Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
WL07-01	12W	100lm/w		IP65	0.68	18
WL07-02	24W	100lm/w	180x140x110mm	IP65	0.68	12
WL07-03	36W	100lm/w		IP65	1.39	8
WL07-01-PIR	12W	100lm/w		IP65	0.78	18
WL07-02-PIR	24W	100lm/w	180x140x110mm	IP65	0.78	12
WL07-03-PIR	36W	100lm/w		IP65	1.39	8



Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
WL08-02	24W	100lm/w	260x225x133mm	IP65	0.80	12
WL08-02-PIR	24W	100lm/w	260x225x169mm	IP65	0.87	12

WL09 Wall Light



- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

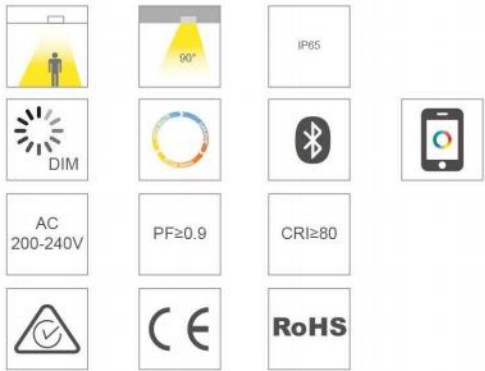
Finish ———  White  Black

WL10 Wall Light



- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

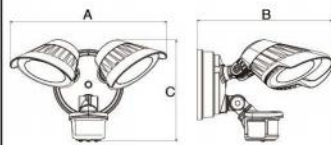
Finish ———  White  Black

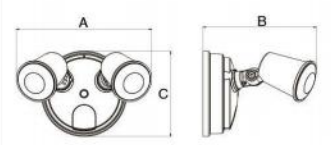


3CCT ———  CW NW WW



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL09-02	24W	100lm/w	209x175x163mm	IP65	0.64	18
	WL09-02-PIR	24W	100lm/w	209x175x163mm	IP65	0.70	18

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL10-02	24W	100lm/w	241x174x117mm	IP65	0.45	18
	WL10-02-PIR	24W	100lm/w	241x174x153mm	IP65	0.51	18

WL11 Wall Light

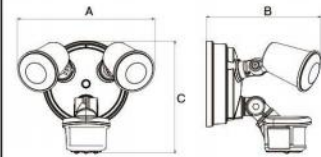


- 1.Optional to be robust single or twin adjustable black or white plastic cover aluminum optical head assembly
- 2.Durable polycarbonate mounting base
- 3. SMD chip, high lumens performance, up to 120lm/w
- 4.Selectable CCT 3000K/4000K/5700K
- 5.High efficiency LED optics, integral non-dimmable LED driver
- 6. A stylish solution for residential exterior spaces
- 7. Very high cost effective
- 8. Optional to be with sensor or non-sensor

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL11-02	24W	100lm/w	186x156x117mm	IP65	0.46	18
	WL11-02-PIR	24W	100lm/w	186x156x153mm	IP65	0.52	18

WL12 Wall Light



- 1.IP54 rating for protection against dust and water splashes
- 2.PA10 waterproof junction box for enhanced durability
- 3.PC diffuser for soft and even light distribution
- 4.3-CCT switchable for adjustable color temperature
- 5.Elegant design suitable for both indoor and outdoor applications

Finish ————  White  Black



3CCT ————  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	WL12-88	10W	80lm/w	Ø88x122mm	IP65	0.94	12
	WL12-78-S	10W	80lm/w	78x78x122.5mm	IP65	0.94	12
	WL12-151-S	10W	80lm/w	152x74x122mm	IP65	1.20	12

Batten Light




BL01 Batten Light



- 1. Quality white powdercoated finish with robust polycarbonate diffuser
- 2. Large 16mm 2 terminal block, easy installation with central cable entry
- 3. High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
- 4. Sliders at both ends open, easy maintainance
- 5. Integral constant current non-dimmable LED driver
- 6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
- 7. Selectable power adjustment with an inbuilt switch
- 8. Steel body 70mm wide

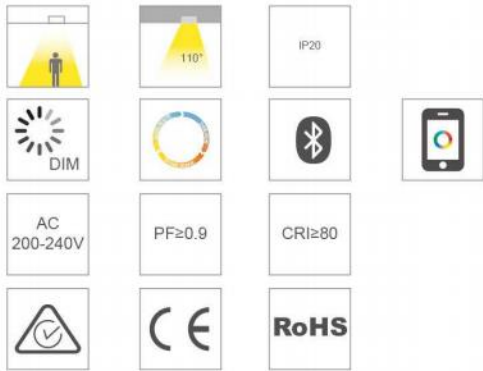
Finish White Black

BL02 Batten Light

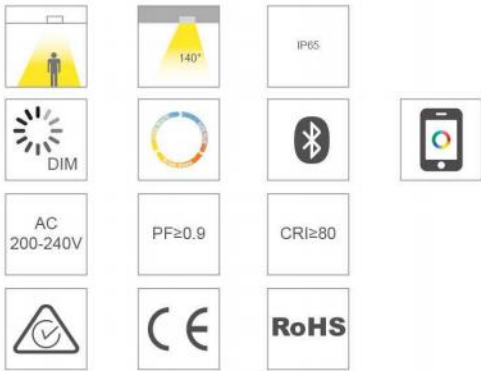


- 1. Quality white powdercoated finish with robust polycarbonate diffuser
- 2. Large 16mm 2 terminal block, easy installation with central cable entry
- 3. High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
- 4. Sliders at both ends open, easy maintainance
- 5. Integral constant current non-dimmable LED driver
- 6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
- 7. Selectable power adjustment with an inbuilt switch
- 8. Steel body 70mm wide

Finish White Black



3CCT CW NW WW



3CCT CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	BL01-01	20W	120lm/w	68x73x596mm	IP20	0.78	10
	BL01-02	40W	120lm/w	68x73x1196mm	IP20	1.35	6
	BL01-03	60W	120lm/w	68x73x1496mm	IP20	1.71	6

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	BL02-600	20W	120lm/w	41x53x600mm	IP65	0.32	20
	BL02-1200	40W	120lm/w	41x53x1150mm	IP65	0.46	20
	BL02-1500	50W	120lm/w	41x53x1500mm	IP65	0.60	15

BL03 Batten Light



- 1. Quality white powdercoated finish with robust polycarbonate diffuser
- 2. Large 16mm 2 terminal block, easy installation with central cable entry
- 3. High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
- 4. Sliders at both ends open, easy maintainance
- 5. Integral constant current non-dimmable LED driver
- 6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
- 7. Selectable power adjustment with an inbuilt switch
- 8. Steel body 70mm wide

Finish  White  Black



3CCT  CW NW WW

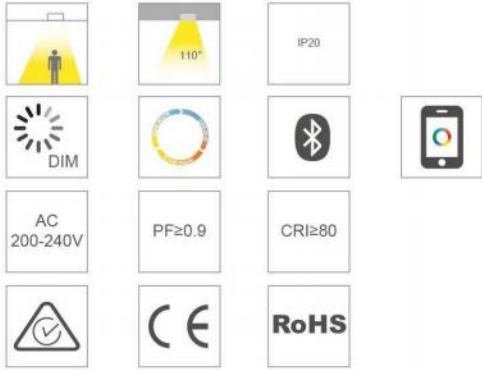
	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	BL01-01	20W	120lm/w	60x64x600mm	IP65	0.49	12
	BL01-02	40W	120lm/w	60x64x1200mm	IP65	0.81	9
	BL01-03	60W	120lm/w	60x64x1500mm	IP65	1.00	9

TPL02 Batten Light



- 1. Rounded profile design, ABS body and UV stabilized PC diffuser
- 2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
- 3. Operating temperature -20 to +40 degree centigrade
- 4. Integral constant current non-dimmable LED driver
- 5. Selectable power adjustment with an inbuilt switch
- 6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
- 7. Multi-purpose commercial or industrial utility applications

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TPL02-600	20W	115lm/w	80x72x600mm	IP20	1.22	15
	TPL02-1200	40W	115lm/w	80x72x1200mm	IP20	1.38	9
	TPL02-1500	50W	115lm/w	80x72x1500mm	IP20	2.33	9

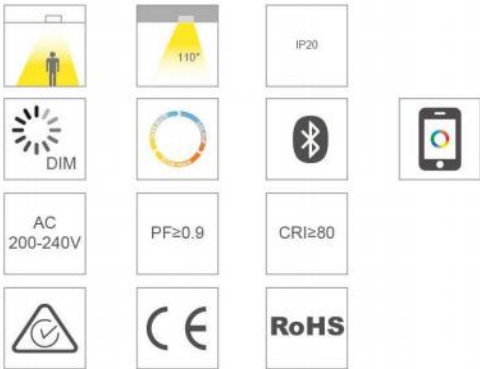
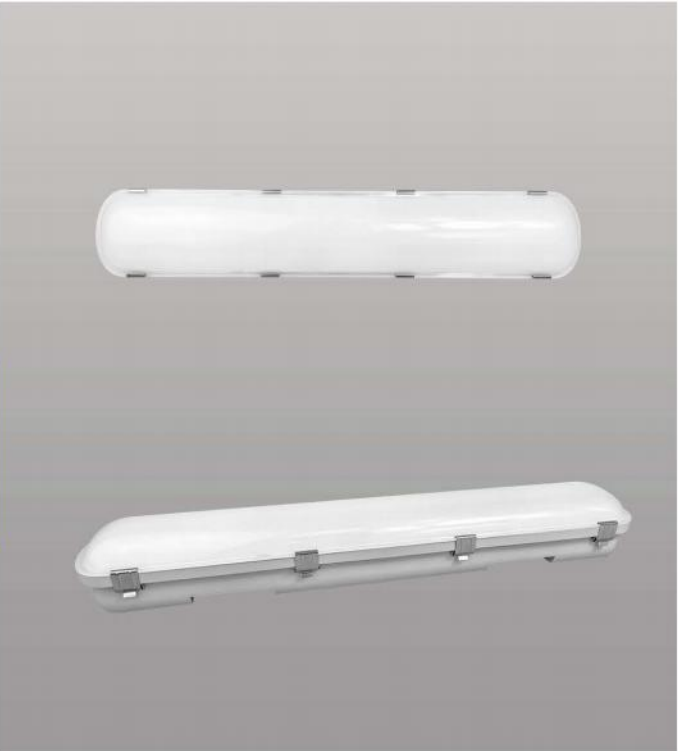
TPL03

Batten Light



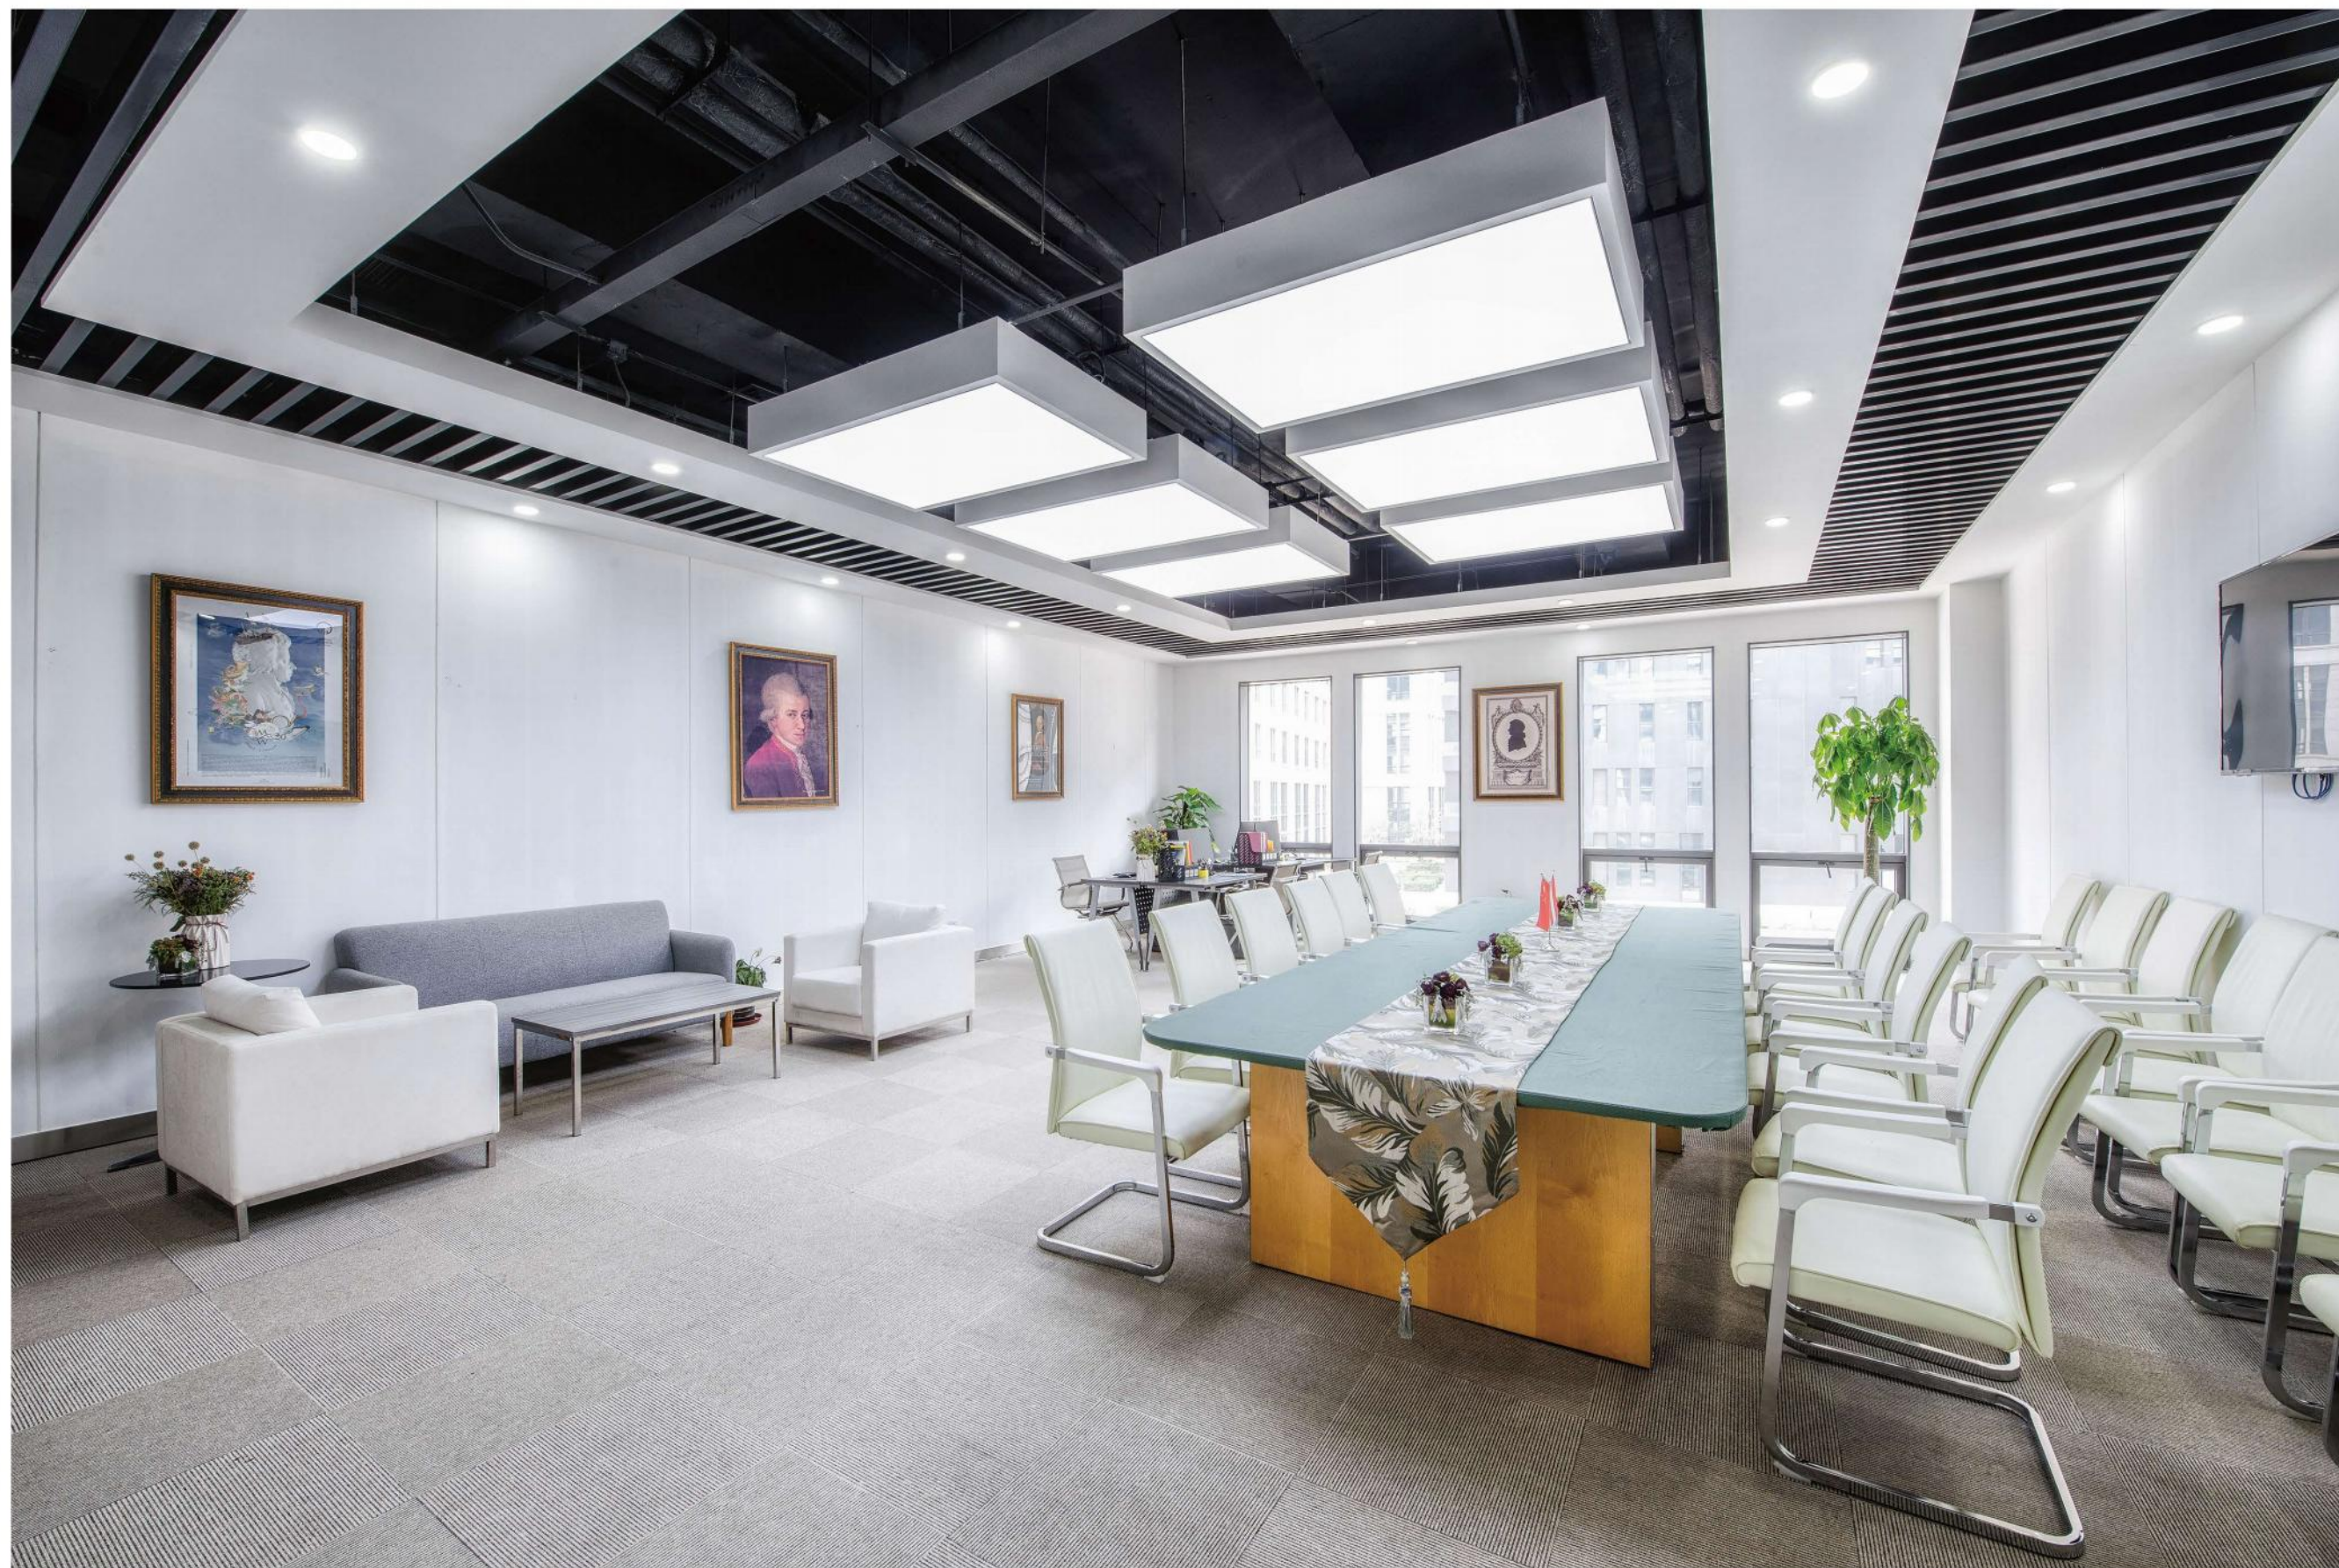
- 1. Rounded profile design, PC body and UV stabilized PC diffuser
- 2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
- 3. Operating temperature -20 to +40 degree centigrade
- 4. Integral constant current non-dimmable LED driver
- 5. Selectable power adjustment with an inbuilt switch
- 6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
- 7. Multi-purpose commercial or industrial utility applications
- 8. Easy to install and easy to link with another LED batten

Finish ———  White  Black



3CCT ———  CW NW WW

	Code	Watt	Lumen(±5)	Size(AxBxCmm)	IP Rated	N.W/pc(kgs)	QTY/CTN
	TPL03-600	20W	115lm/w	110x80x600mm	IP20	1.12	15
	TPL03-1200	20W	115lm/w	110x80x1200mm	IP20	1.28	9
	TPL03-1500	50W	115lm/w	110x80x1500mm	IP20	2.23	9



Panel Light

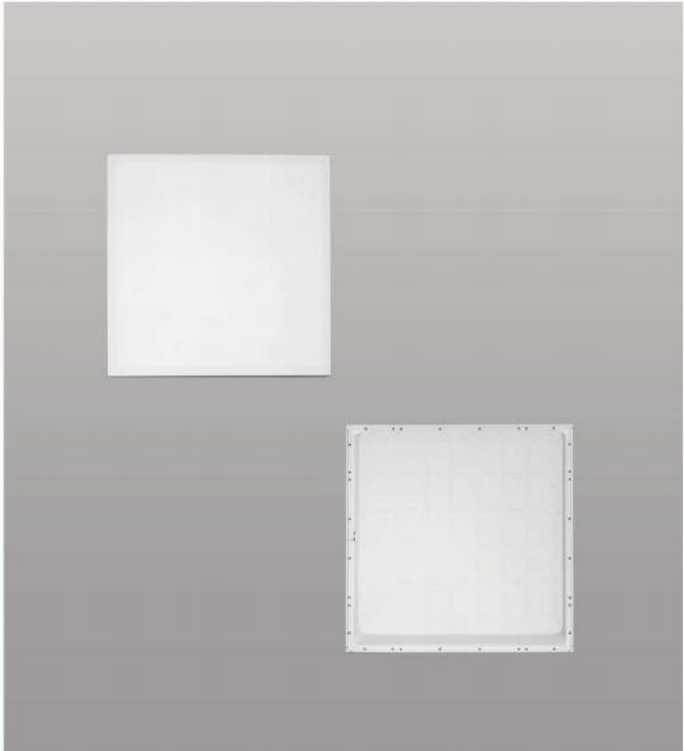
PL6060

Panel Light

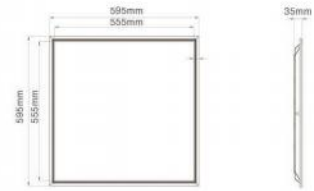


- 1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
- 2. Good quality aluminum, good heat sink
- 3. lumen efficiency can up to 140lm/w
- 4. Optional to tri-colour on the light to help you to reduce the stock qty's
- 5. Innovative product, Light is even, no dark area
- 6. Optional to do UGR<19
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size	IP Rated	N.W/pc(kgs)	QTY/CTN
	PL6060	25W/30W	110lm/w	595x595x35mm	IP20	0.83	5

PL12030

Panel Light

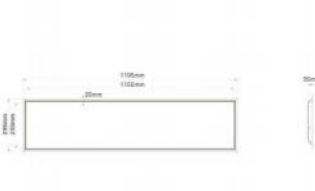


- 1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
- 2. Good quality aluminum, good heat sink
- 3. lumen efficiency can up to 140lm/w
- 4. Optional to tri-colour on the light to help you to reduce the stock qty's
- 5. Innovative product, Light is even, no dark area
- 6. Optional to do UGR<19
- 7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
- 8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish  White  Black



3CCT  CW NW WW

	Code	Watt	Lumen(±5)	Size	IP Rated	N.W/pc(kgs)	QTY/CTN
	PL12030	36W	110lm/w	1195x295x35mm	IP20	1.57	5

Panel Light



1. Easy to install, Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty's
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT

Finish



White



Black



IP20



AC
200-240V

PF ≥ 0.9

CRI≥



RoHS



3CCT

CW

NW

WW

	Code	Watt	Lumen(±5)	Size	IP Rated	N.W/pc(kgs)	QTY/CTN
	PL12060	50W	110lm/w	1195x595x35mm	IP20	1.98	4

SAA

SM-001 10A Single Plug Base

Szie: (Dia: 65mm W: 82mm H: 51.5mm)



PB1L 10A Single Plug Base

Size: (Dia: 65mm W: 84mm H : 53.5mm)



QCS 10A Quick Connect Socket

Szie: (Dia: 45mm W: 68mm H: 46mm)

